

Characteristics:

General description:

This Termination Board (TB) provides direct connection between the I/O Card of the system and D5000 Series modules. The Intrinsically Safe protection and signal isolation between Safe and Hazardous Area is provided by D5000 Series Associated Apparatus. The 24 Vdc Power Supply of the TB is connected to two plug-in terminal blocks, for a redundant power supply. The power supply for modules is given by TB power bus.

Termination Board general characteristics:

Termination Board Model	Number of positions	Features
TB-D5016-YOK-007	16	1) I/O Card redundancy; 2) Power Supply voltage redundancy; 3) Abnormal supply voltage signaling; 4) Cumulative module fault signaling.

Supported Yokogawa Prosafe RS I/O Cards:

I/O Card Model	I/O Card Type	Number of channels per I/O Card	Number of I/O Cards per board	Number of channels per board	Supported GM Modules
SDV144	Digital In	16	1+(1)*	16	D5031S D5032S
			2+(2)*	32	D5031D D5032D

* with possibility of I/O Card redundancy.

Features:

- 2 x DI card type SDV144 (16 channels) Digital Input board interface.
- 16 positions Terminal Board for up to 32 channels.
- Lower cables installation and maintenance costs.
- Power supplies fault monitoring.
- Spare fuse provided.
- Mounting hardware provided for:
 - Single Din Rail mounting kit;
 - Wall mounting, M4 self tapping screw;
 - Wall mounting, M4 thread screw.

Ordering Information:

Model: TB-D5016-YOK-007

Technical Data:

Supply:

24 Vdc nom (20 to 30 Vdc) reverse polarity protected, double terminal blocks for redundant power supply, with OR diodes to mix supply voltages.

Connection: by polarized plug-in disconnect screw terminal blocks to accommodate terminations up to 2.5 mm².

Protection fuse: 4 A slow blow (spare fuse provided on Termination Board).

Fault detection: (for more information see Fault Logic section)

Abnormal supply voltages or module cumulative fault: PWR 1 or PWR 2 is in under (< 18 Vdc) or over (> 30 Vdc) voltage condition OR module cumulative fault indication.

Relay fault signaling: a voltage free NE SPST-1 Form A relay contact (de-energized in fault condition), with the following characteristics:

Contact material: AgCdO.

Contact rating: 2 A 36 Vac 72 VA, 2 A 48 Vdc 80 W (resistive load).

Mechanical / Electrical life: 30 * 10⁶ / 1 * 10⁵ operation, typical.

Connection: by polarized plug-in disconnect screw terminal blocks to accommodate terminations up to 2.5 mm².

LED fault signaling: 1 green LED (PWR 1 OK); 1 green LED (PWR 2 OK);

1 red LED (UV or OV of PWR 1); 1 red LED (UV or OV of PWR 2);

a cumulative fault red LED.

Prosafe RS I/O card interface:

Connection: four 50 poles male connectors (require female mating connectors).

Field signal:

Connection: directly to module by polarized plug-in disconnect screw terminal blocks to accommodate terminations up to 2.5 mm².

Environmental conditions:

Operating: temperature limits – 40 to + 70 °C,

relative humidity max 90 % non condensing, up to 35 °C.

Storage: temperature limits – 45 to + 80 °C.

Mounting:


Hardware included for mounting on wall and single DIN rail.

Weight: about 400 g (excluding modules and mounting options).


Location: Safe Area / Ordinary locations.

Dimensions: Width 267 mm, Depth 176 mm, Height 125 mm.

Image:

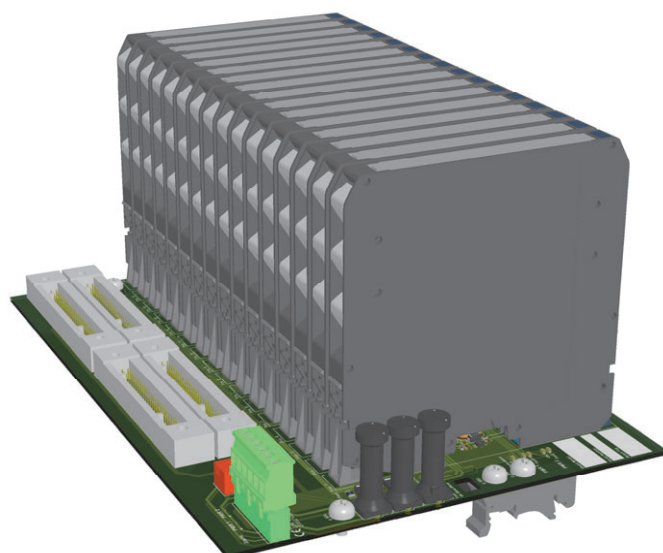

Loop Diagrams for Prosafe RS SDV144 (16 DI) Interface Card:

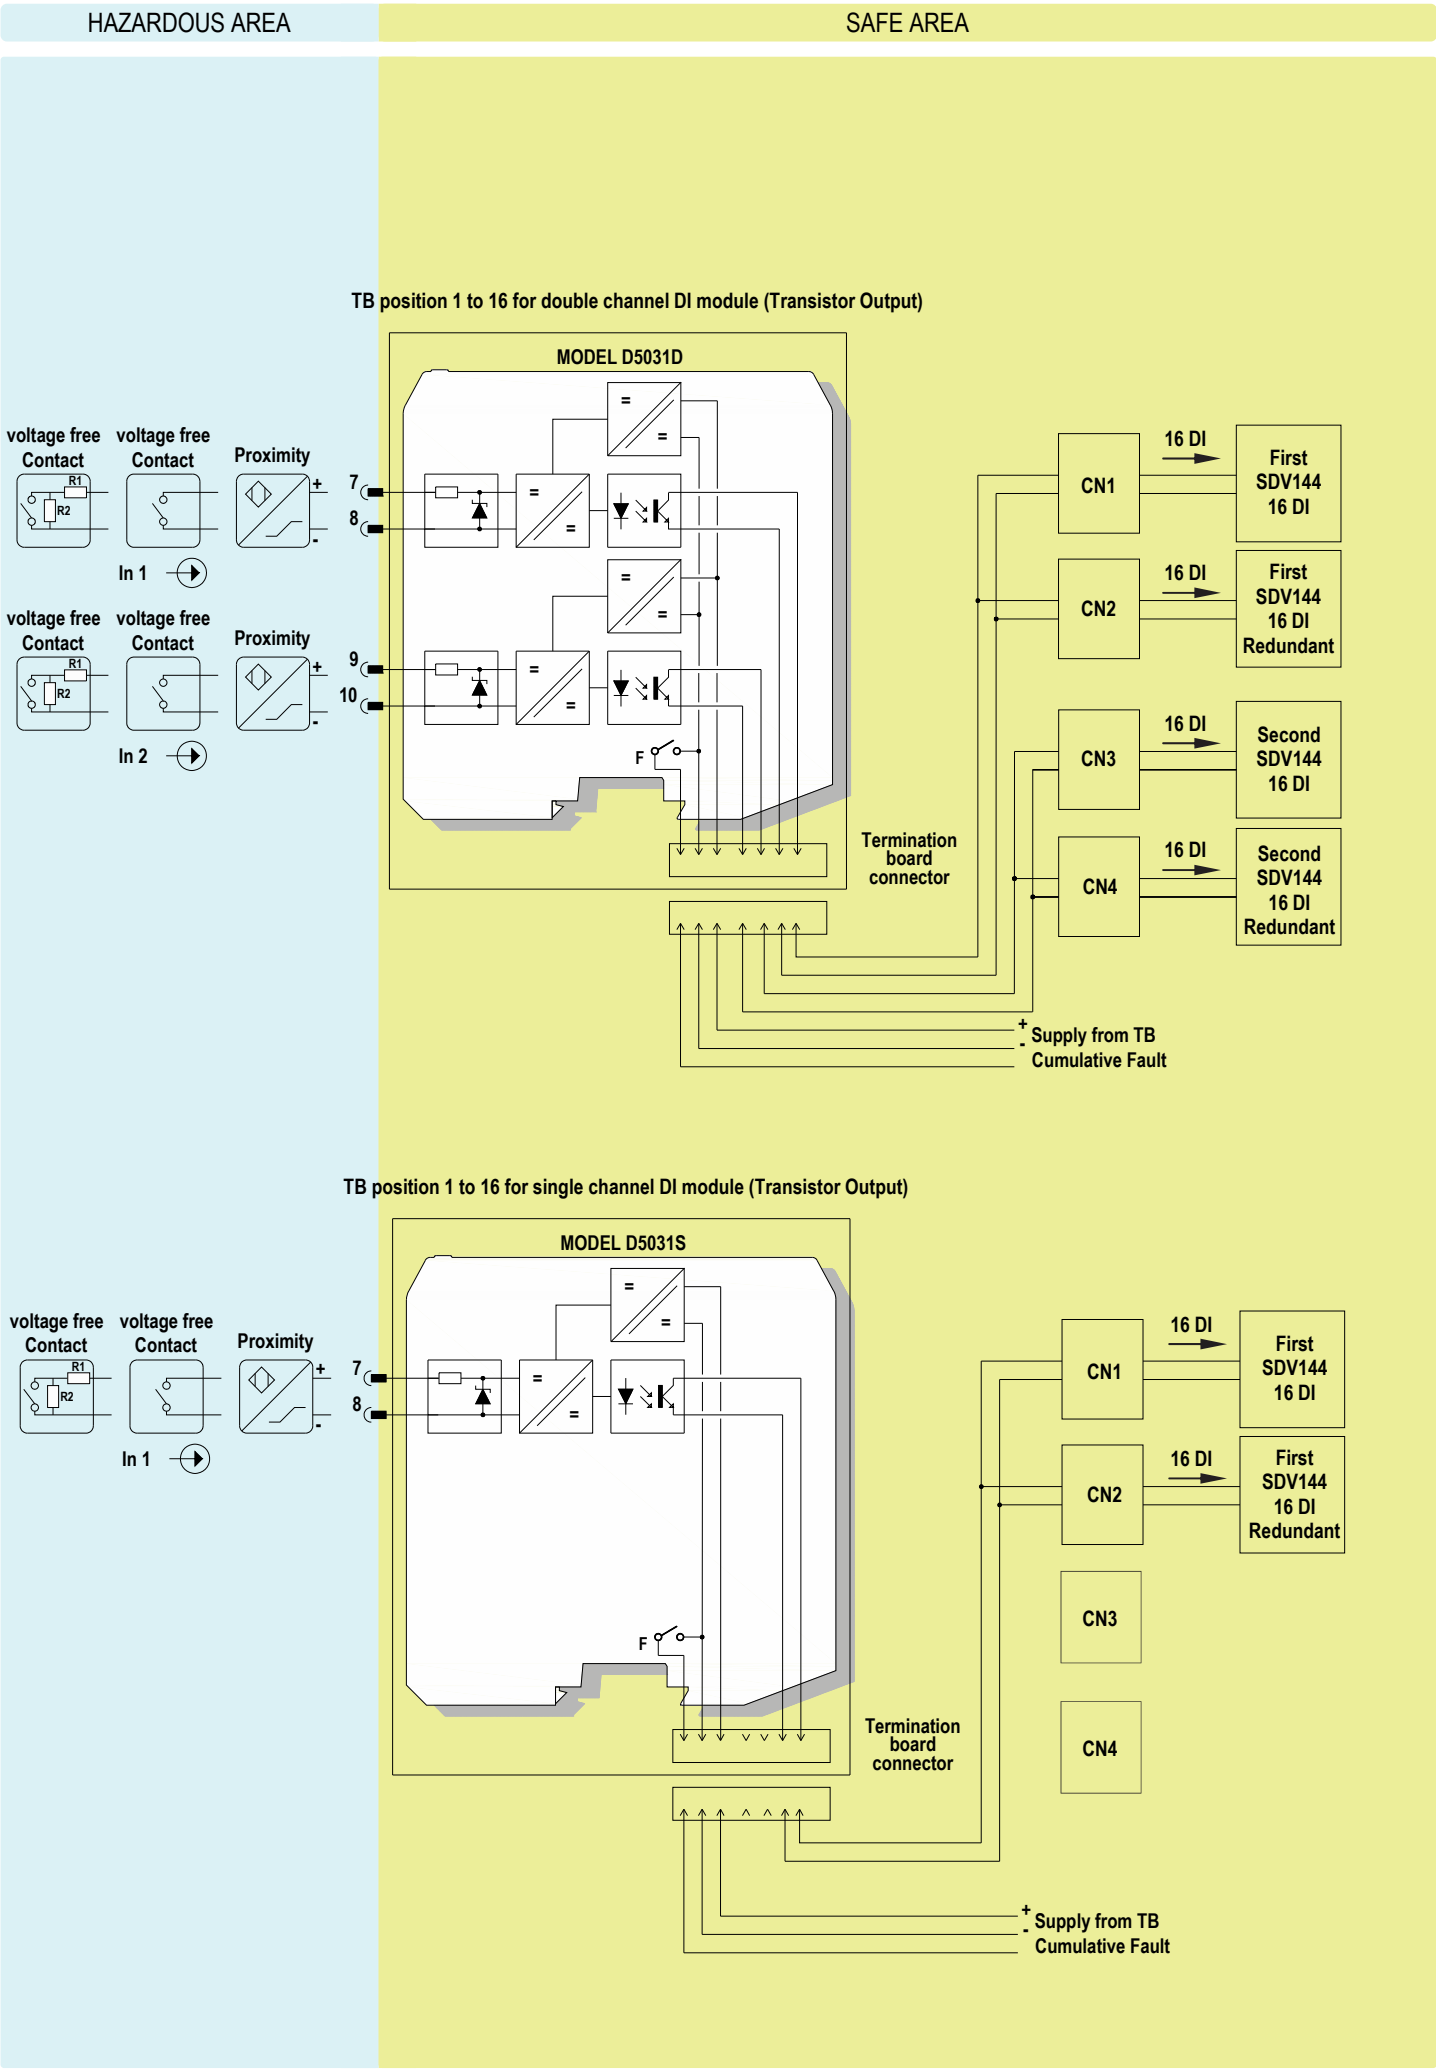


Loop Diagrams for Prosafe RS SDV144 (16 DI) Interface Card:


HAZARDOUS AREA

SAFE AREA

TB position 1 to 16 for double channel DI module (Relay Output)

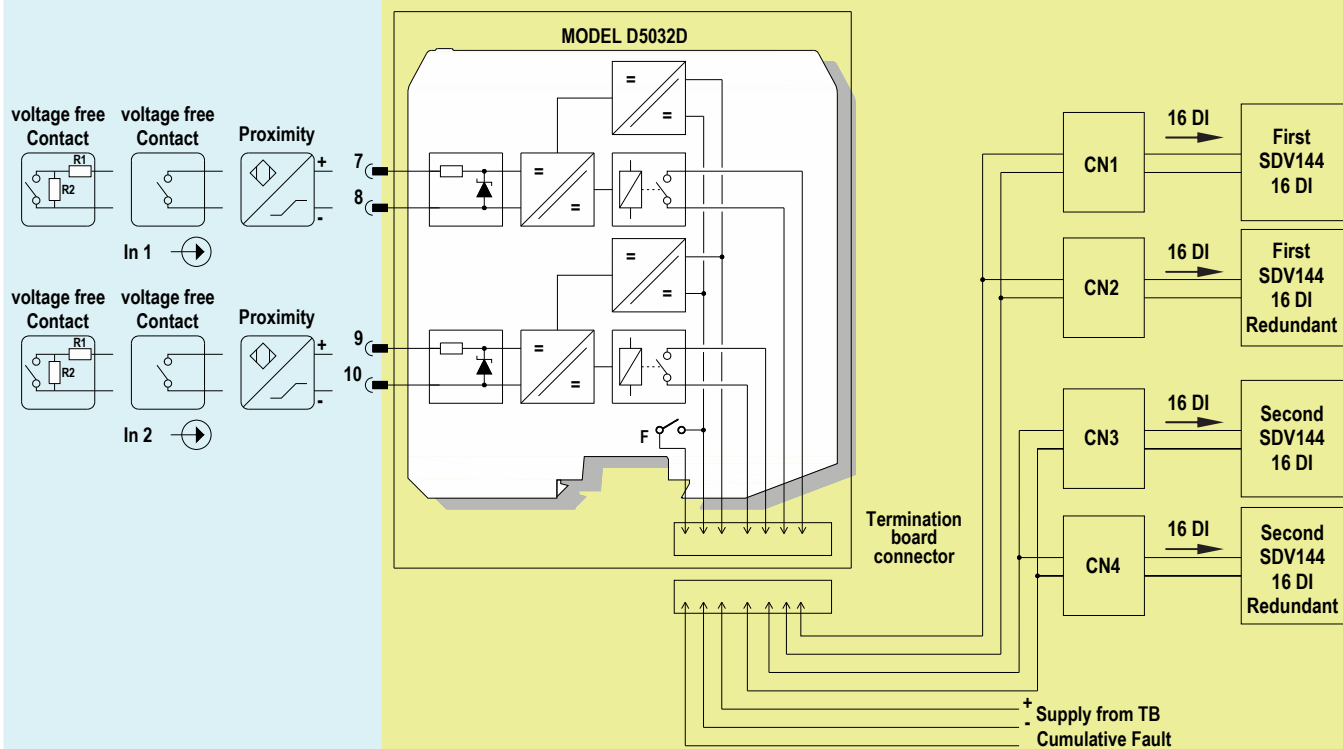


TB position 1 to 16 for single channel DI module (Relay Output)

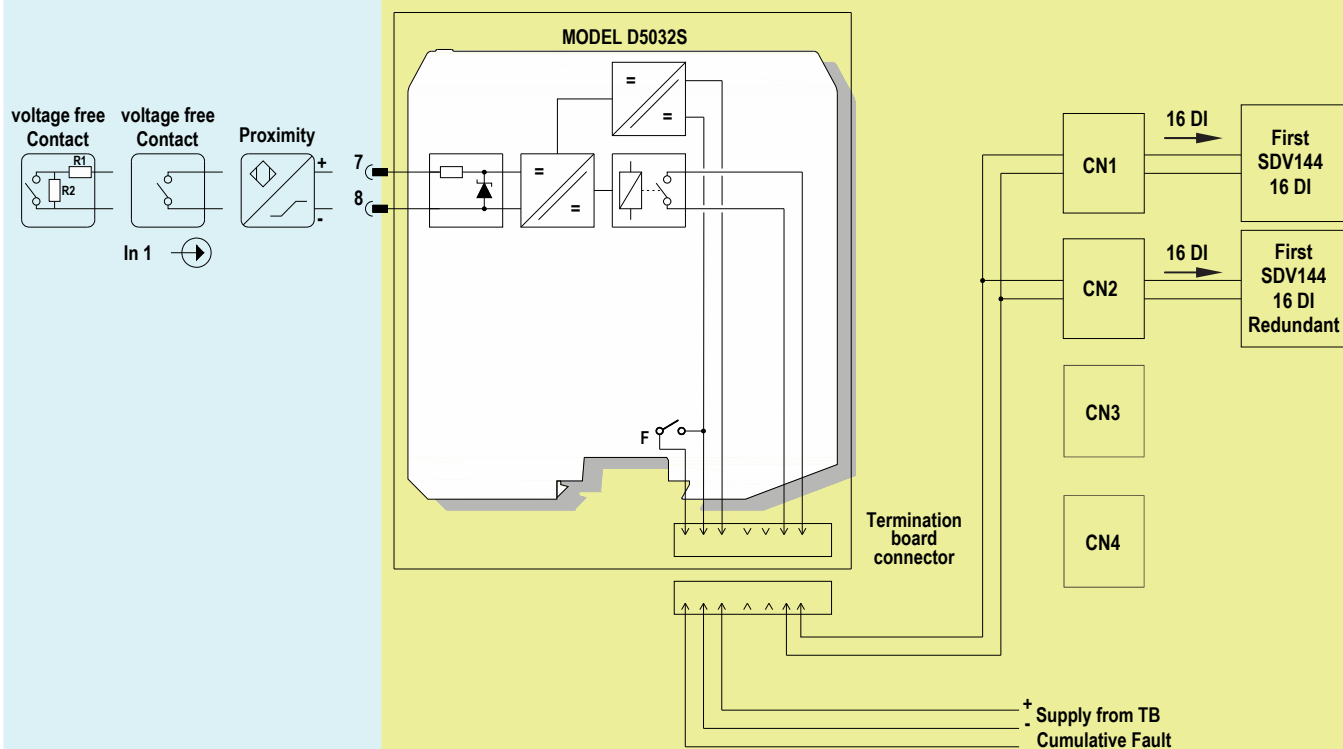

Note:


Relay contact is defined Normally Closed (NC) or Normally Open (NO) when RL1 or RL2 relays are de-energized (that is, coil status LED is turned off).
Relay is de-energized in fault status.

HAZARDOUS AREA / LOCATION

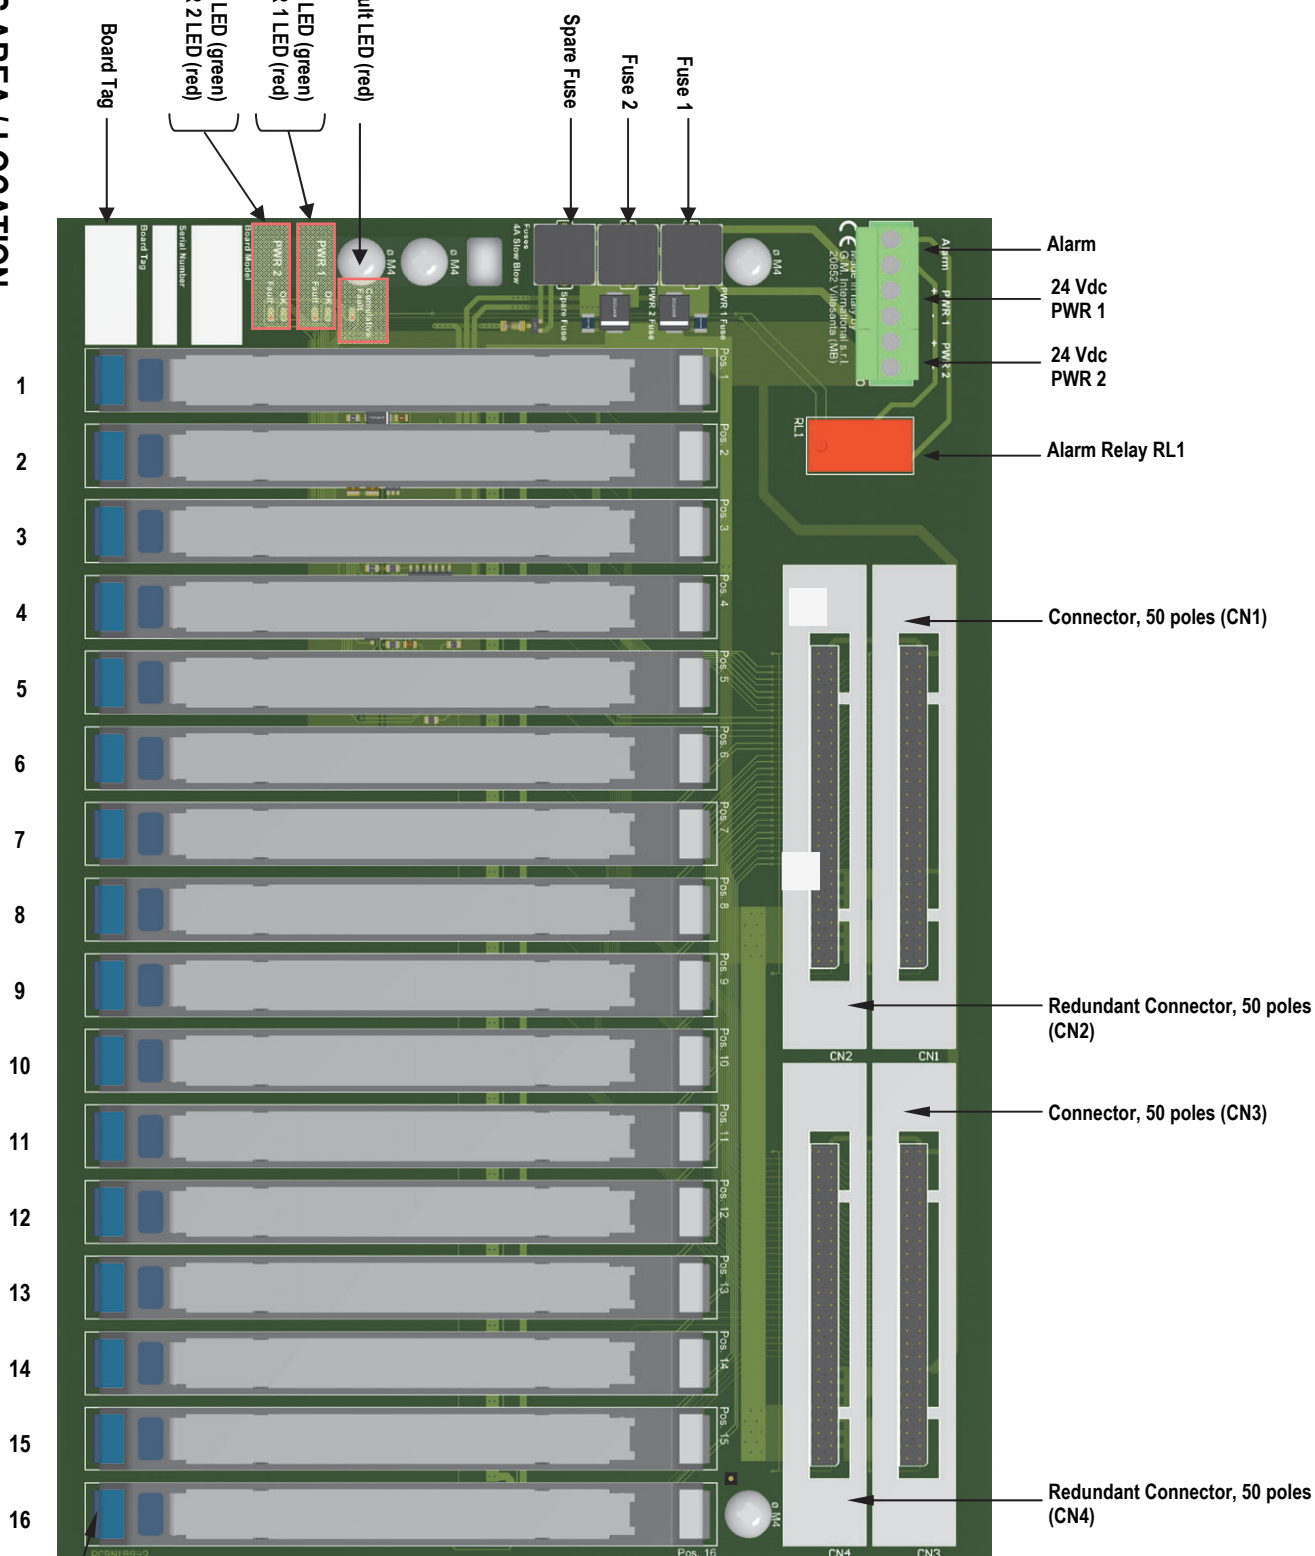


LED Signaling:
Meaning of LEDs on termination boards:

TAG	LED COLOR	MEANING
PWR 1 OK	GREEN	The LED is on when PWR 1 is within the regular range (>18 V and <30 V).
PWR 1 Over or Under V	RED	The LED is on when PWR 1 is in over-voltage (>30V) or under-voltage (<18 V).
PWR 2 OK	GREEN	The LED is on when PWR 2 is within the regular range (>18 V and <30 V).
PWR 2 Over or Under V	RED	The LED is on when PWR 2 is in over-voltage (>30V) or under-voltage (<18 V).
Cumulative Fault	RED	The LED is on when at least one module / barrier reported a fault.

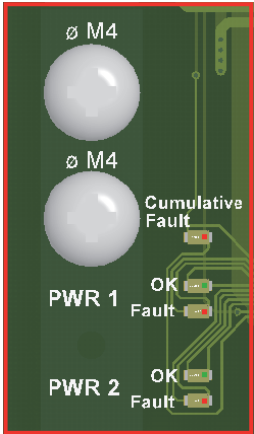


Relay Activation Conditions:
The two relays are activated according to the following rules:

TAG	ACTIVATION
ALARM	The relay is energized when the following two conditions hold: 1. both supply voltages are within the regular range (>18 V and <30 V). 2. No module / barrier fault is reported.

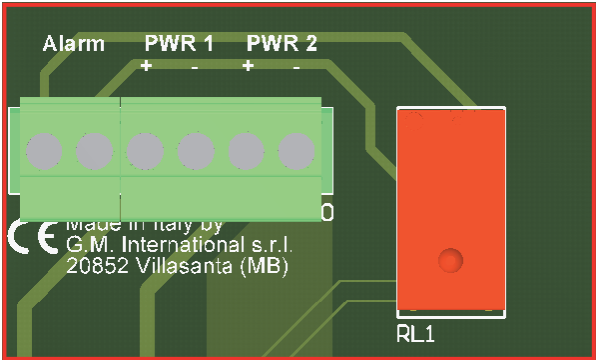


SAFE AREA / ORDINARY LOCATION

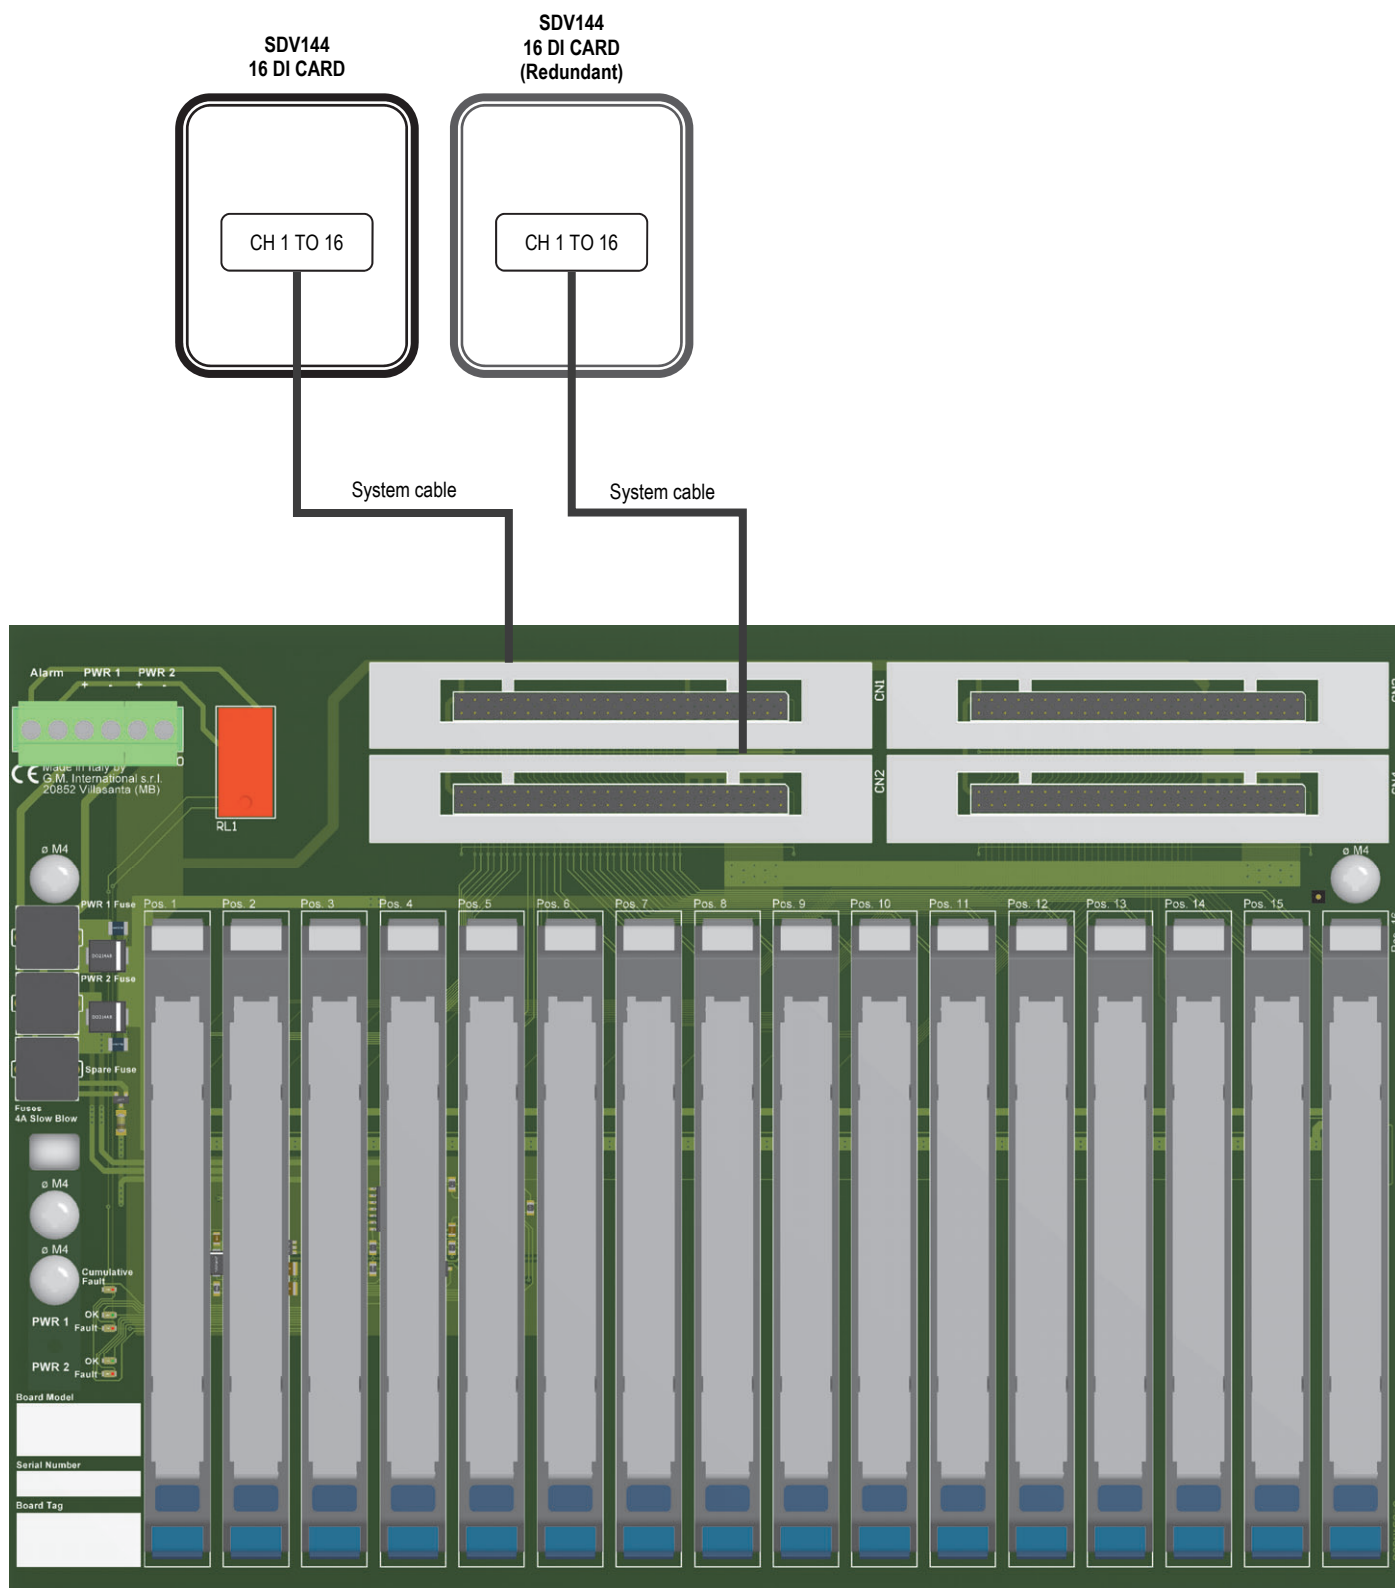


HAZARDOUS AREA / LOCATION

SAFE AREA / ORDINARY LOCATION

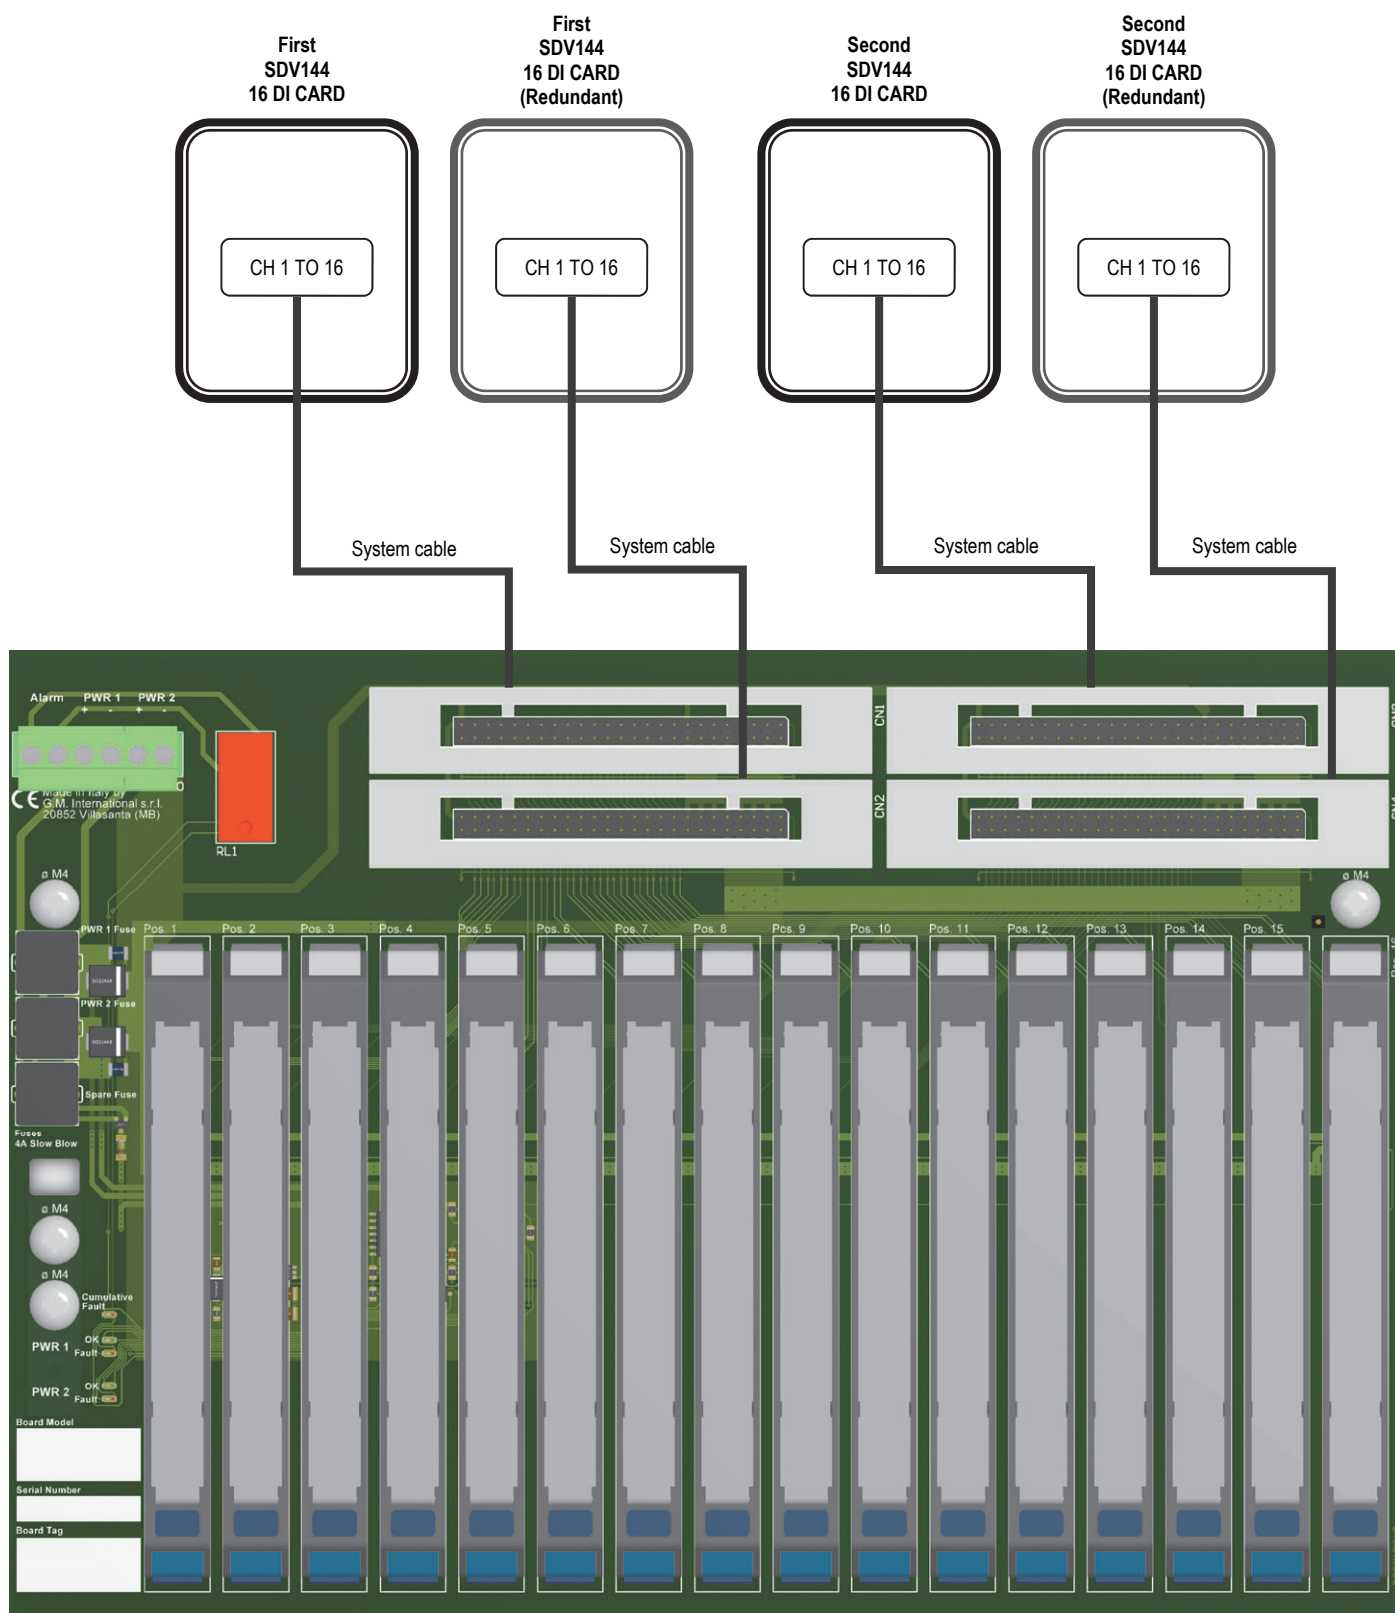


HAZARDOUS AREA / LOCATION

Bottom view

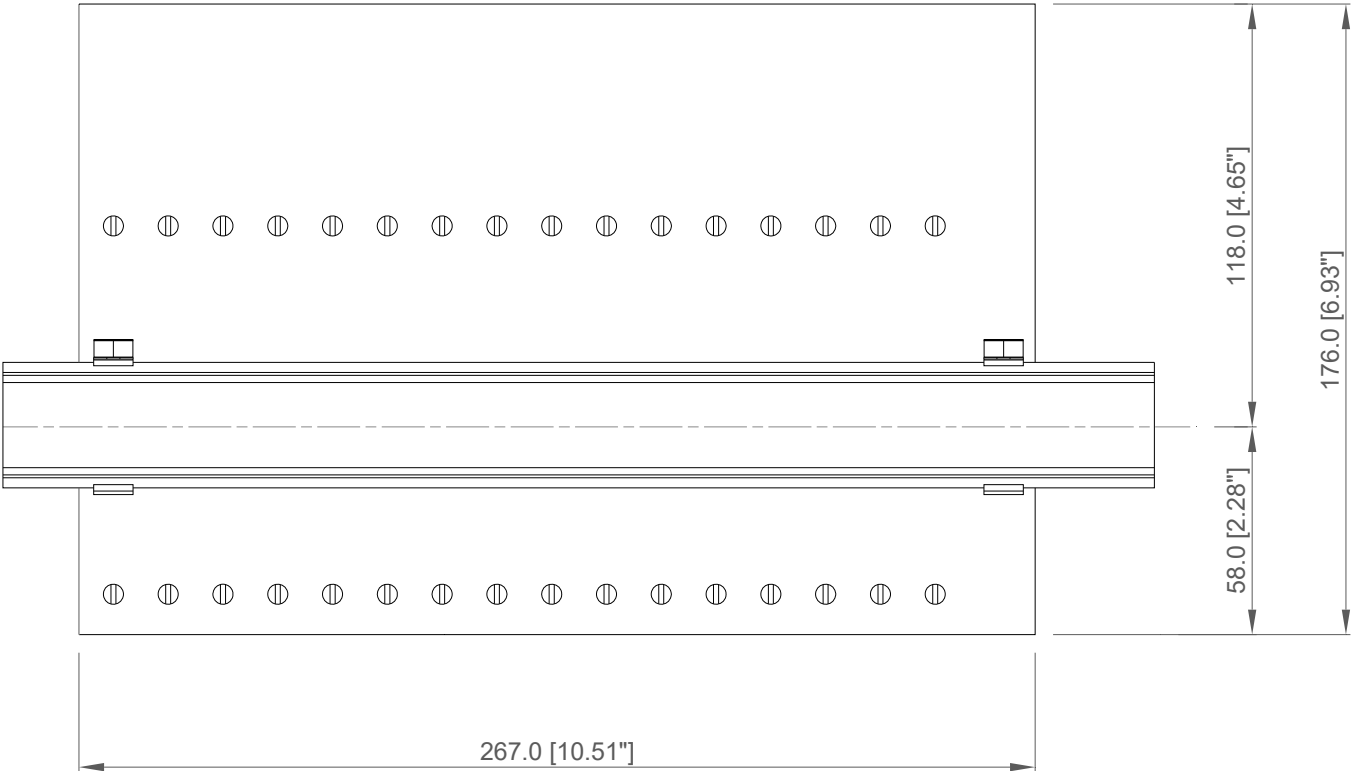


Side view

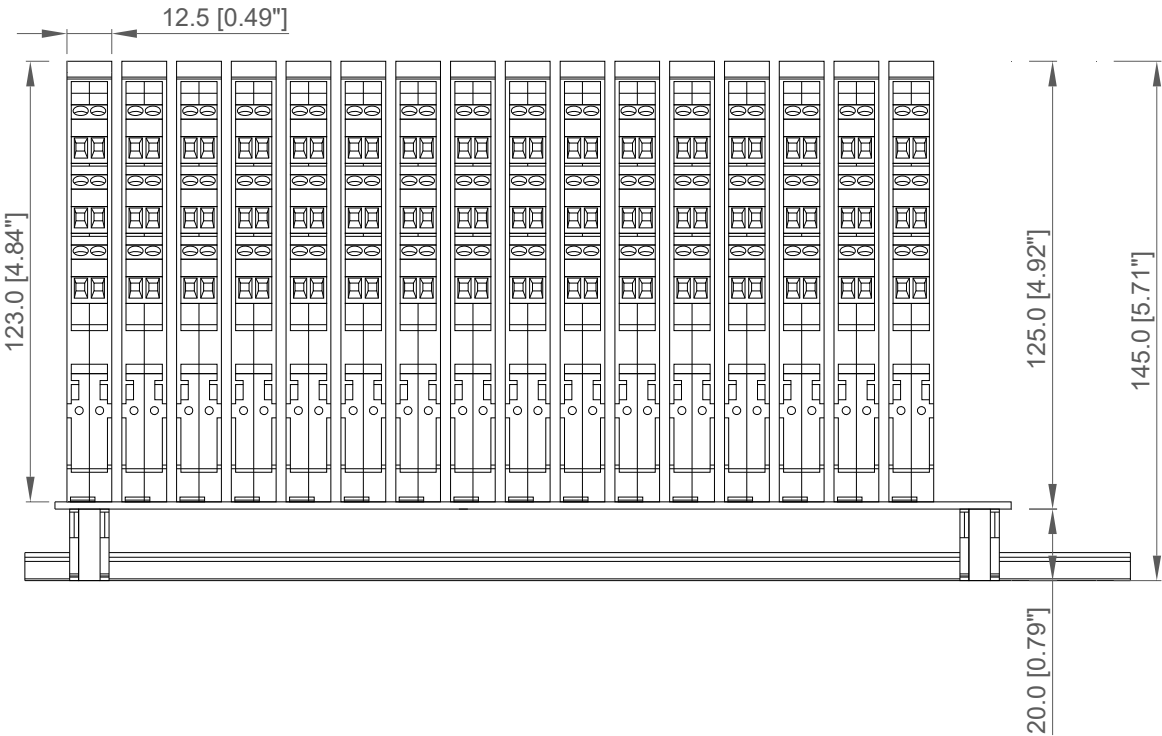


All dimensions are expressed in millimeters [inches]

Mounting features kit TB-OPT-001

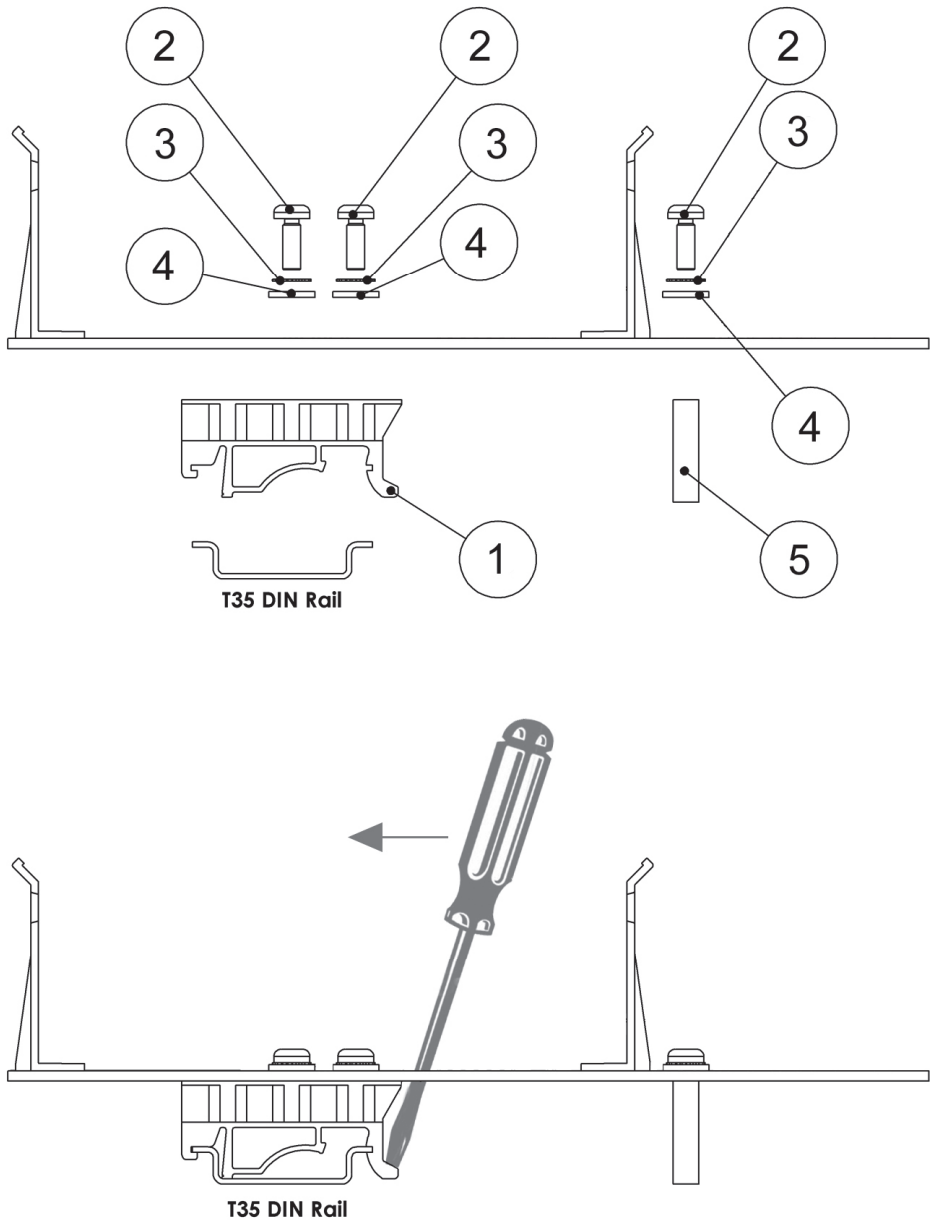


Ref. Nr	Q.ty	Description	Material
1	2	T35 Din Rail Adapter	PA
2	6	3.5 x 9.5 Self tapping screw	Stainless Steel
3	6	M3 External Tooth lock Washer	Stainless Steel
4	6	M3 Washer	Stainless Steel
5	2	6 c 20 Spacer	PA

Bottom view


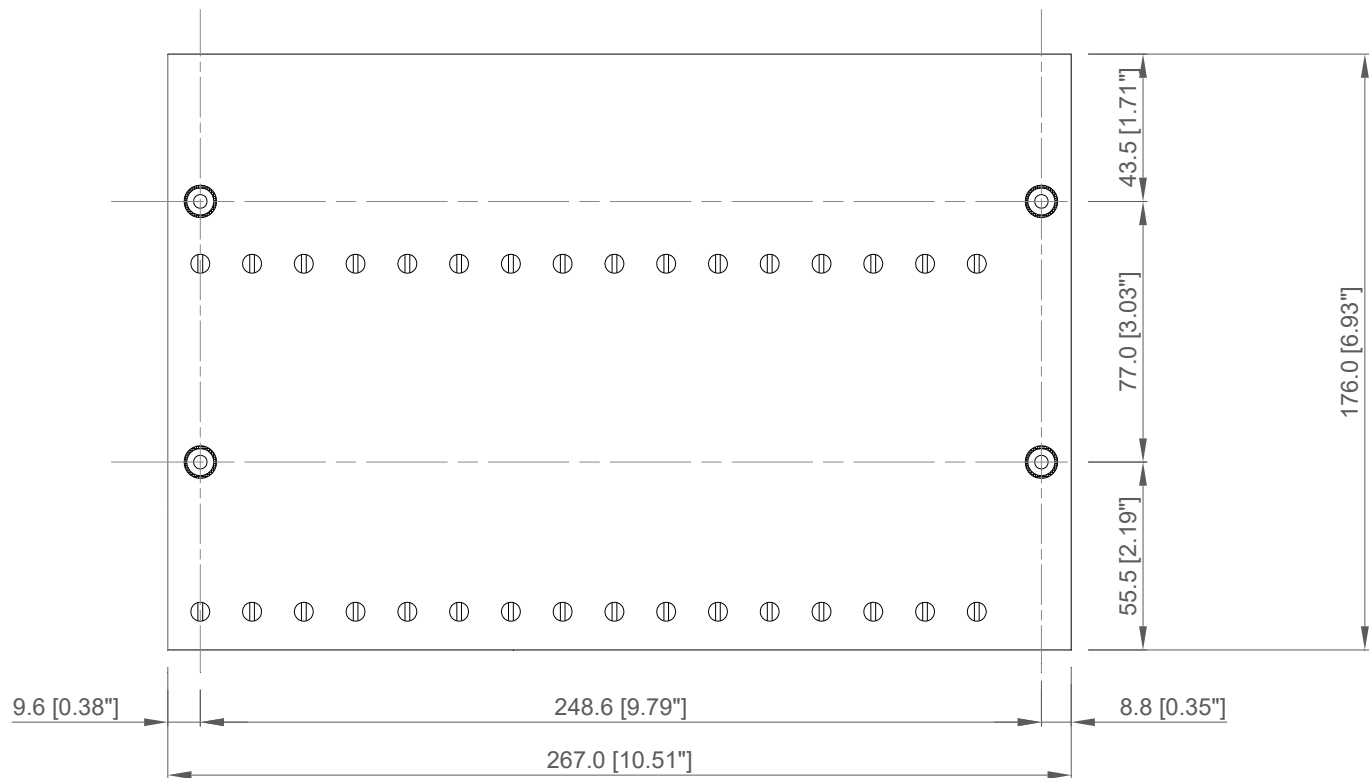


Side view


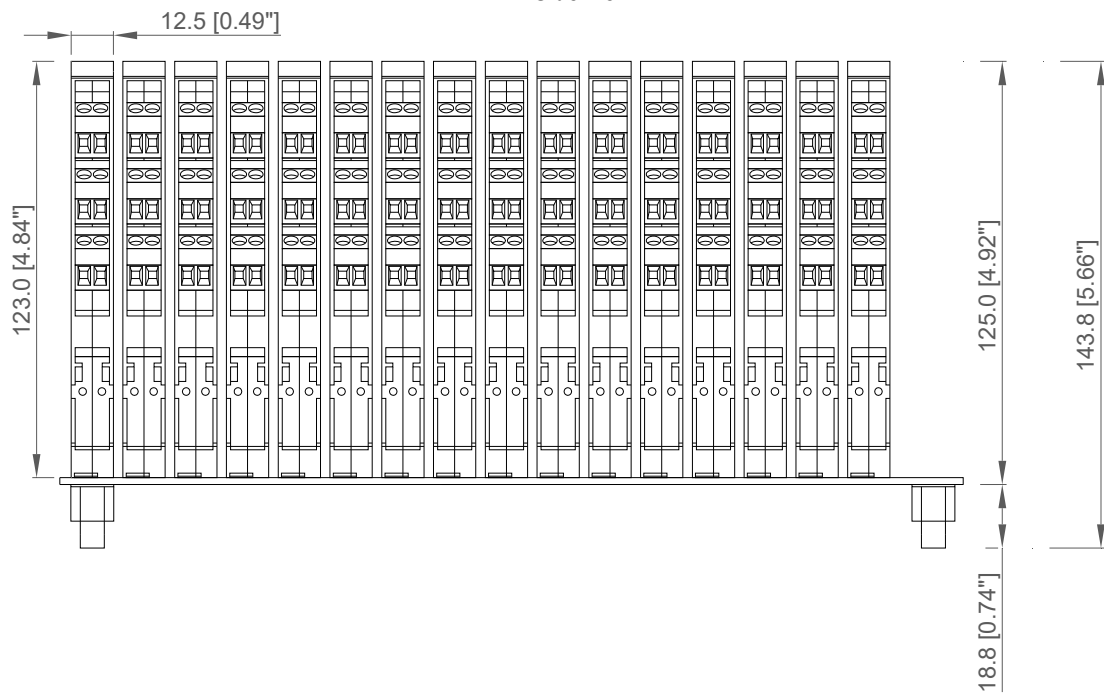


All dimensions are expressed in millimeters [inches]

Mounting features kit TB-OPT-001

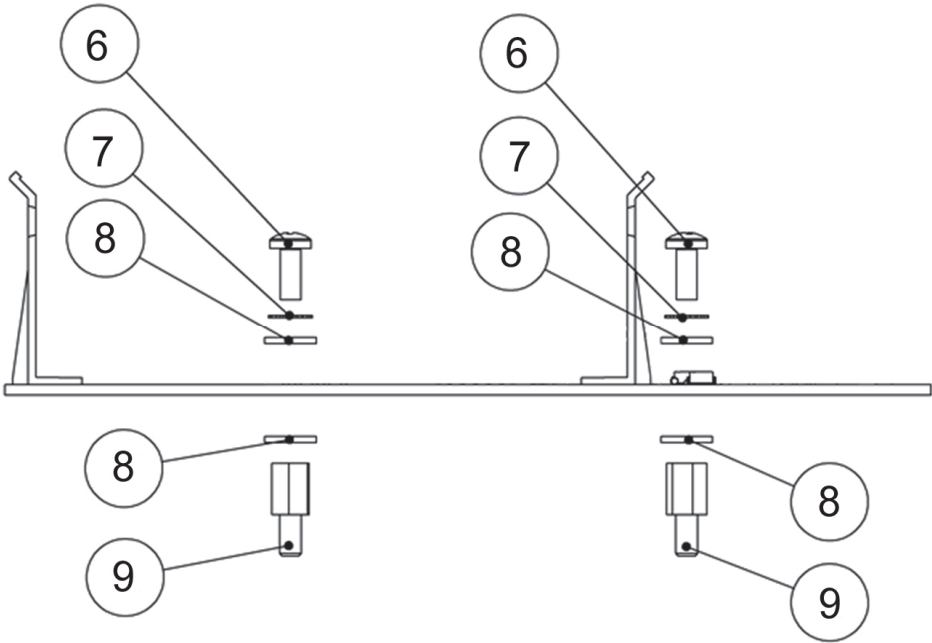
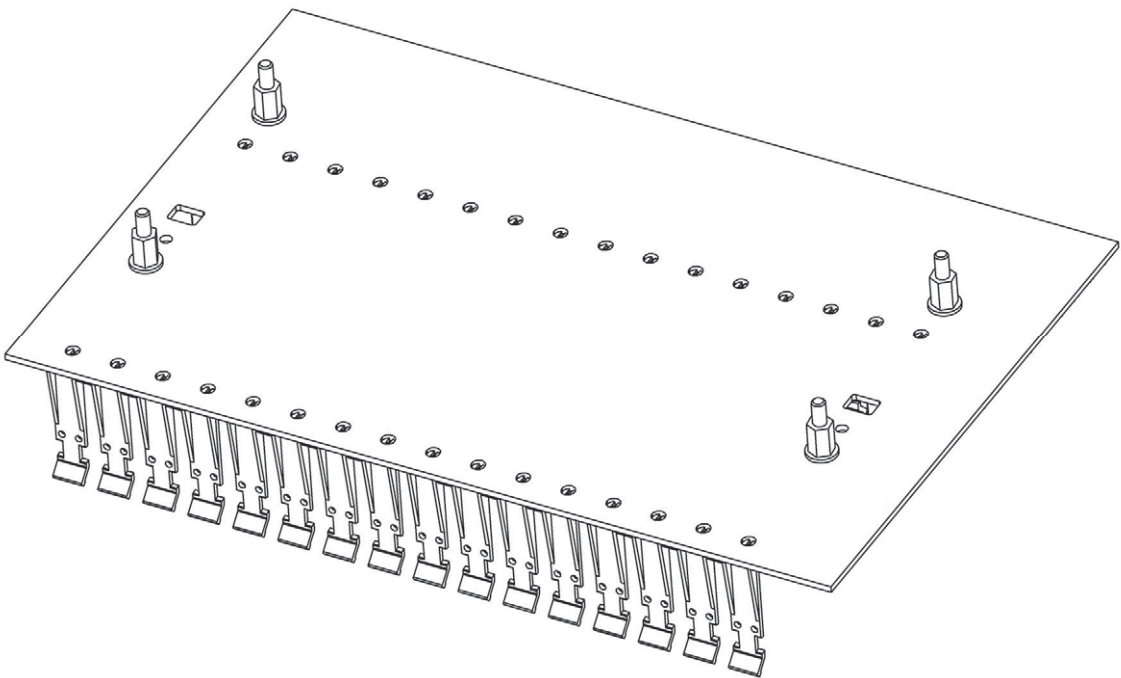


Ref. Nr	Q.ty	Description	Material
6	4	M4 x 8 Screw	Stainless Steel
7	4	M4 External Tooth lock Washer	Stainless Steel
8	8	M4 Washer	Stainless Steel
9	4	Self Tapping Spacer	NI - Plated Brass

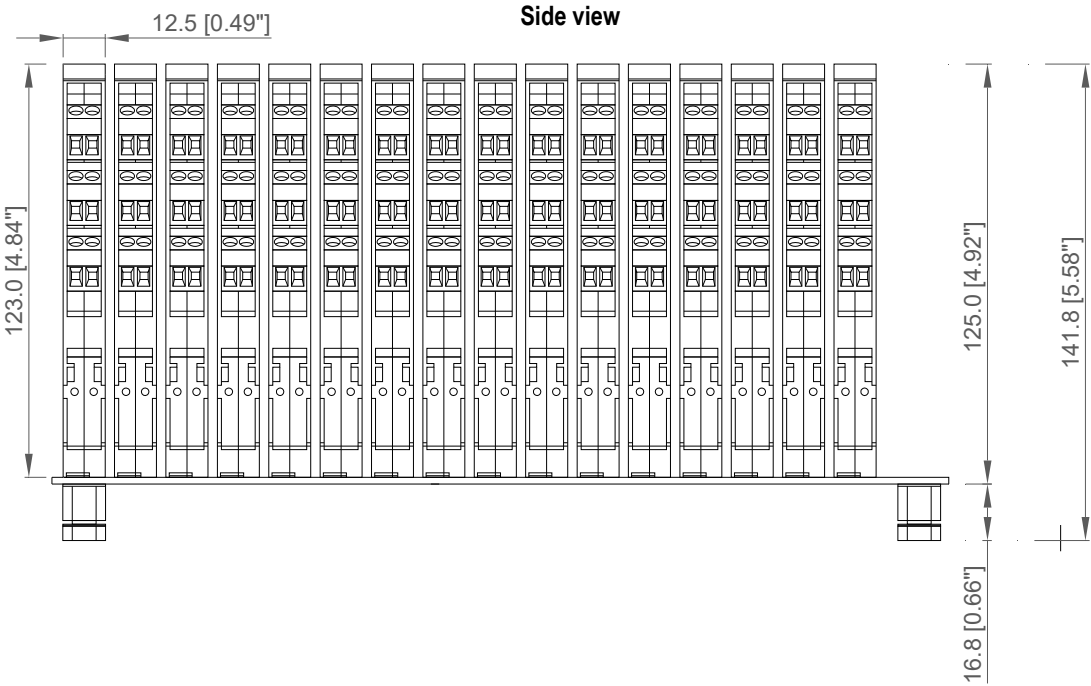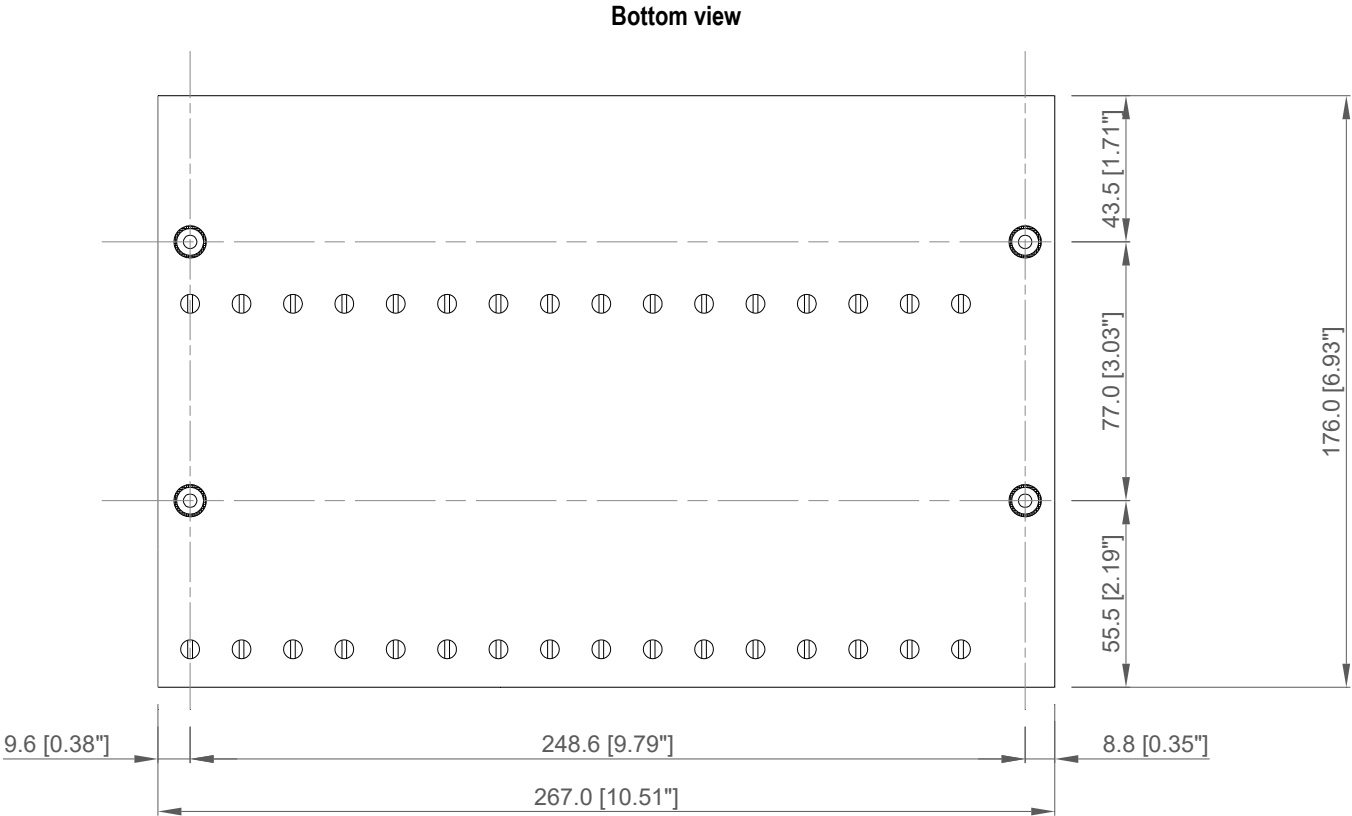


All dimensions are expressed in millimeters [inches]

Mounting features kit TB-OPT-001

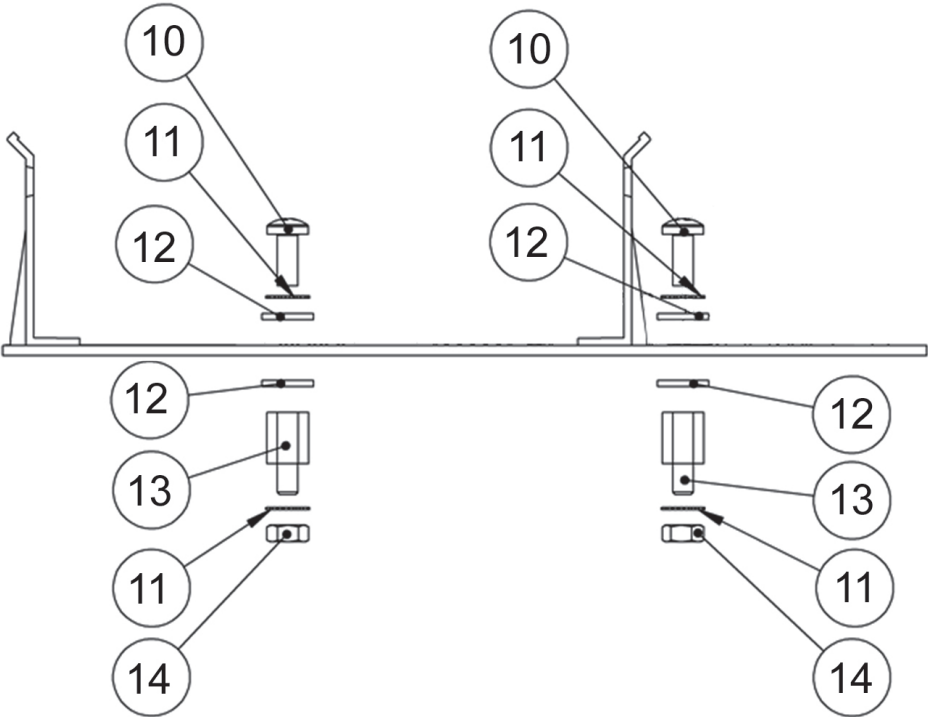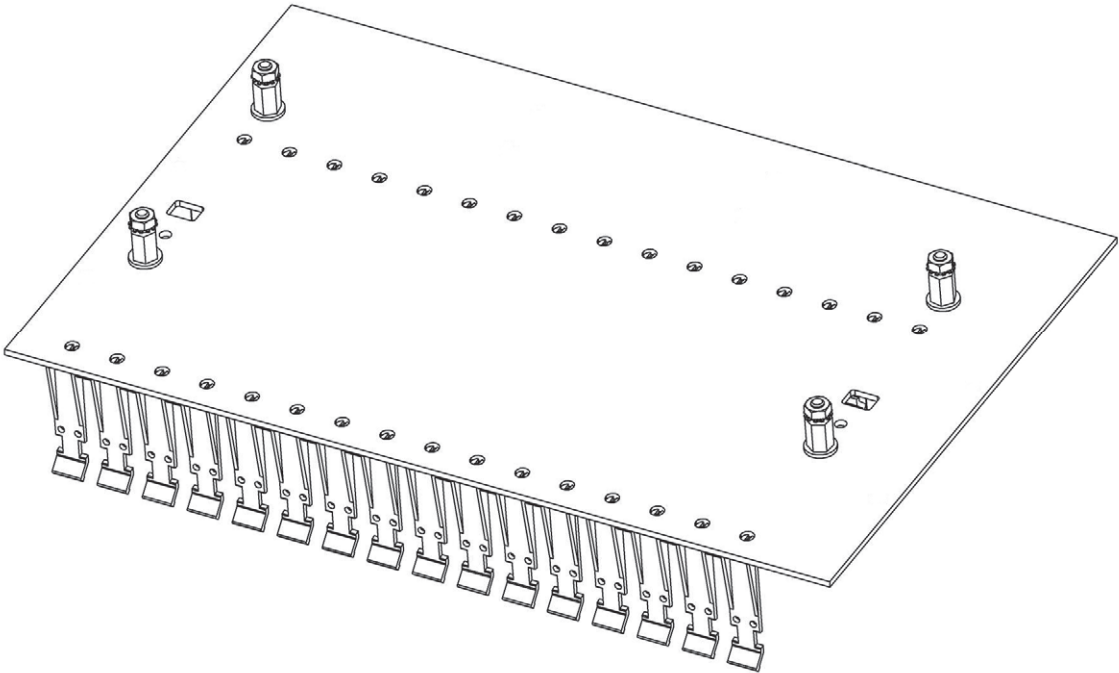

Ref. Nr	Q.ty	Description	Material
10	4	M4 x 8 Screw	Stainless Steel
11	8	M4 External Tooth lock Washer	Stainless Steel
12	8	M4 Washer	Stainless Steel
13	4	Threaded Spacer	NI - Plated Brass
14	4	M4 Nut	Stainless Steel

Connections table to Interface Card:

FIELD DEVICE	MODULE TYPE	MODULE FUNCTION	MODULE POSITION	MODULE CHANNEL NUMBER (“B” is only for Double channel)	INTERFACE CARD CHANNEL NUMBER	INTERFACE CARD CONN.(50 poles) PIN NUMBER	INTERFACE CARD REDUNDANT CONN.(50 poles) PIN NUMBER	NOTE
	D5031S, D5032S, (Single channel) - D5031D, D5032D, (Double channel)	Digital Input	1	1A	1 (1st SDV144)	(-) 47 (CN1) (+) 48 (CN1)	(-) 47 (CN2) (+) 48 (CN2)	• Interface Card Connectors CN1, CN2: 50 poles male. The poles No. 2, 3, 4, 5, 6, 7, 8, 10 are connected to +24 Vdc supply of the Termination Board. The poles No. 9, 11, 12, 13, 14, 15, 16, 49 are connected to GND of the Termination Board. The poles No. 1 and No. 50 are connected together.
				1B	1 (2nd SDV144)	(-) 47 (CN3) (+) 48 (CN3)	(-) 47 (CN4) (+) 48 (CN4)	
			2	2A	2 (1st SDV144)	(-) 45 (CN1) (+) 46 (CN1)	(-) 45 (CN2) (+) 46 (CN2)	
				2B	2 (2nd SDV144)	(-) 45 (CN3) (+) 46 (CN3)	(-) 45 (CN4) (+) 46 (CN4)	
			3	3A	3 (1st SDV144)	(-) 43 (CN1) (+) 44 (CN1)	(-) 43 (CN2) (+) 44 (CN2)	
				3B	3 (2nd SDV144)	(-) 43 (CN3) (+) 44 (CN3)	(-) 43 (CN4) (+) 44 (CN4)	
			4	4A	4 (1st SDV144)	(-) 41 (CN1) (+) 42 (CN1)	(-) 41 (CN2) (+) 42 (CN2)	
				4B	4 (2nd SDV144)	(-) 41 (CN3) (+) 42 (CN3)	(-) 41 (CN4) (+) 42 (CN4)	
			5	5A	5 (1st SDV144)	(-) 39 (CN1) (+) 40 (CN1)	(-) 39 (CN2) (+) 40 (CN2)	
				5B	5 (2nd SDV144)	(-) 39 (CN3) (+) 40 (CN3)	(-) 39 (CN4) (+) 40 (CN4)	
			6	6A	6 (1st SDV144)	(-) 37 (CN1) (+) 38 (CN1)	(-) 37 (CN2) (+) 38 (CN2)	
				6B	6 (2nd SDV144)	(-) 37 (CN3) (+) 38 (CN3)	(-) 37 (CN4) (+) 38 (CN4)	
			7	7A	7 (1st SDV144)	(-) 35 (CN1) (+) 36 (CN1)	(-) 35 (CN2) (+) 36 (CN2)	
				7B	7 (2nd SDV144)	(-) 35 (CN3) (+) 36 (CN3)	(-) 35 (CN4) (+) 36 (CN4)	
			8	8A	8 (1st SDV144)	(-) 33 (CN1) (+) 34 (CN1)	(-) 33 (CN2) (+) 34 (CN2)	
				8B	8 (2nd SDV144)	(-) 33 (CN3) (+) 34 (CN3)	(-) 33 (CN4) (+) 34 (CN4)	
			9	9A	9 (1st SDV144)	(-) 31 (CN1) (+) 32 (CN1)	(-) 31 (CN2) (+) 32 (CN2)	
				9B	9 (2nd SDV144)	(-) 31 (CN3) (+) 32 (CN3)	(-) 31 (CN4) (+) 32 (CN4)	
			10	10A	10 (1st SDV144)	(-) 29 (CN1) (+) 30 (CN1)	(-) 19 (CN2) (+) 20 (CN2)	
				10B	10 (2nd SDV144)	(-) 29 (CN3) (+) 30 (CN3)	(-) 19 (CN4) (+) 20 (CN4)	
			11	11A	11 (1st SDV144)	(-) 27 (CN1) (+) 28 (CN1)	(-) 27 (CN2) (+) 28 (CN2)	
				11B	11 (2nd SDV144)	(-) 27 (CN3) (+) 28 (CN3)	(-) 27 (CN4) (+) 28 (CN4)	
			12	12A	12 (1st SDV144)	(-) 25 (CN1) (+) 26 (CN1)	(-) 25 (CN2) (+) 26 (CN2)	
				12B	12 (2nd SDV144)	(-) 25 (CN3) (+) 26 (CN3)	(-) 25 (CN4) (+) 26 (CN4)	
			13	13A	13 (1st SDV144)	(-) 23 (CN1) (+) 24 (CN1)	(-) 23 (CN2) (+) 24 (CN2)	
				13B	13 (2nd SDV144)	(-) 23 (CN3) (+) 24 (CN3)	(-) 23 (CN4) (+) 24 (CN4)	
			14	14A	14 (1st SDV144)	(-) 21 (CN1) (+) 22 (CN1)	(-) 21 (CN2) (+) 22 (CN2)	
				14B	14 (2nd SDV144)	(-) 21 (CN3) (+) 22 (CN3)	(-) 21 (CN4) (+) 22 (CN4)	
			15	15A	15 (1st SDV144)	(-) 19 (CN1) (+) 20 (CN1)	(-) 19 (CN2) (+) 20 (CN2)	
				15B	15 (2nd SDV144)	(-) 19 (CN3) (+) 20 (CN3)	(-) 19 (CN4) (+) 20 (CN4)	
			16	16A	16 (1st SDV144)	(-) 17 (CN1) (+) 18 (CN1)	(-) 17 (CN2) (+) 18 (CN2)	
				16B	16 (2nd SDV144)	(-) 17 (CN3) (+) 18 (CN3)	(-) 17 (CN4) (+) 18 (CN4)	

