

Characteristics:

General Description:

The single and dual channel DIN Rail Switch/Proximity Detector Interface, D1034S and D1034D is a high integrity repeater designed to interface contacts or proximity detectors located in Hazardous Area, maintaining a high level of loop integrity (safety integrity level SIL 3 according to IEC61508).

Field loop integrity and status (line plus contact or proximitor) are continuously and directly monitored, in transparent mode, into the PLC, ESD, DCS using their existing input line, without requiring an additional channel for failure detection.

This solution results in 100 % input channel saving with evident space, cost and failure risk benefits.

Function:

1 or 2 totally independent and isolated channels I.S. for voltage free contact or EN60947-5-6 proximity switches. Provides 3 port isolation (input/output/supply).

Signalling LED:

Power supply indication (green).

EMC:

Fully compliant with CE marking applicable requirements.

Technical Data:

Supply:

12-24 Vdc nom (10 to 30 Vdc) reverse polarity protected, ripple within voltage limits ≤ 5 Vpp.

Current consumption @ 24 V: 40 mA for 2 channels D1034D, 20 mA for 1 channel D1034S with short circuit input typical.

Current consumption @ 12 V: 80 mA for 2 channels D1034D, 40 mA for 1 channel D1034S with short circuit input typical.

Power dissipation: 1.4 W for 2 channels D1034D, 0.7 W for 1 channel D1034S with 24 V supply voltage, short circuit input and 24 V loop output voltage.

Max. power consumption: at 30 V supply voltage and short circuit input, 1.2 W for 2 channels D1034D, 0.6 W for 1 channel D1034S.

Isolation (Test Voltage):

I.S. In/Out 1.5 KV; I.S. In/Supply 1.5 KV; I.S. In/I.S. In 500 V; Out/Supply 500 V; Out/Out 500 V.

Input:

Current levels: ≥ 0.1 mA, ≤ 7.0 mA

Input equivalent source: 8 V 1 K Ω typical (8 V no load, 8 mA short circuit).

Output:

0.1 to 7.0 mA in sink mode, V min. 5 V at 0 Ω load V max. 30 V, current limited at ≈ 8 mA, repeats input current level.

Response time: 5 ms (10 to 90 % step change).

Compatibility:


CE CE mark compliant, conforms to Directive: 2014/34/EU ATEX, 2014/30/EU EMC, 2014/35/EU LVD, 2011/65/EU RoHS.

Environmental conditions:

Operating: temperature limits -20 to + 60 °C, relative humidity max 90 % non condensing, up to 35 °C.

Storage: temperature limits - 45 to + 80 °C.

Safety Description:



ATEX: II (1)G [Ex ia Ga] IIC, II (1)D [Ex ia Da] IIIC, I (M1) [Ex ia Ma] I; II 3G Ex ec IIC T4 Gc

IECEx: [Ex ia Ga] IIC, [Ex ia Da] IIIC, [Ex ia Ma] I; Ex ec IIC T4 Gc

inmetro: [Ex ia Ga] IIC, [Ex ia Da] IIIC, [Ex ia Ma] I

Uo/Voc = 9.6 V, Io/Isc = 11 mA, Po/Po = 25 mW at terminals 14-15, 10-11.

Um = 250 Vrms, -20 °C \leq Ta \leq 60 °C.

Approvals:

DMT 01 ATEX E 042 X conforms to EN60079-0, EN60079-11.

IECEx BVS 07.0027X conforms to IEC60079-0, IEC60079-11.

IMQ 09 ATEX 013 X conforms to EN60079-0, EN60079-7.

IECEx IMQ 13.0011X conforms to IEC60079-0, IEC60079-7.

INMETRO DNV 13.0108 X conforms to ABNT NBR IEC60079-0, ABNT NBR IEC60079-11.

UL & C-UL E222308 conforms to UL913, UL 60079-0, UL60079-11, UL60079-15,

ANSI/IISA 12.12.01 for UL and CSA-C22.2 No.157-92, CSA-E60079-0, CSA-E60079-11, CSA-C22.2 No. 213 and CSA-E60079-15 for C-UL.

FM & FM-C No. 3024643, 3029921C, conforms to Class 3600, 3610, 3611, 3810 and

C22.2 No.142, C22.2 No.157, C22.2 No.213, E60079-0, E60079-11, E60079-15,

EA3C RU C-IT.HA67.B.00113/20 conforms to GOST 31610.0, GOST 31610.11,

GOST 31610.15.

Cl Ω 16.0034 X conforms to DCTY 7113, GOCT 22782.5-78, DCTY IEC 60079-15.

TUV Certificate No. C-IS-183645-01, SIL 2 / SIL 3 according to IEC 61508.

Please refer to Functional Safety Manual for SIL applications.

DNV No. TAA00002BM and KR No.MIL20769-EL001 Cert. for maritime applications.

Mounting:

EN/IEC60715 TH 35 DIN-Rail.

Weight: about 160 g D1034D, 110 g D1034S.

Connection: by polarized plug-in disconnect screw terminal blocks to accommodate terminations up to 2.5 mm².

Location: Safe Area/Non Hazardous Locations or Zone 2, Group IIC T4,


Class I, Division 2, Groups A, B, C, D Temperature Code T4 and

Class I, Zone 2, Group IIC, IIB, IIA T4 installation.

Protection class: IP 20.

Dimensions: Width 22.5 mm, Depth 99 mm, Height 114.5 mm.

Front Panel and Features:

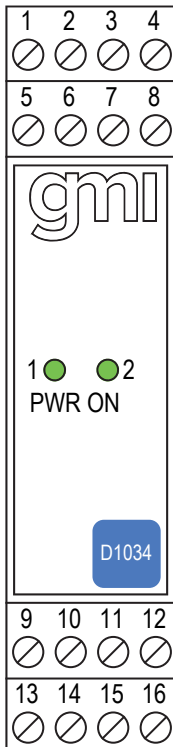

- SIL 3 according to IEC 61508 for Tproof = 1 / 2 years (10 / 20 % of total SIF).
- SIL 2 according to IEC 61508 for Tproof = 10 years (10 % of total SIF).
- PFDavg (1 year) 8.41 E-05, SFF 93.24 %.
- 2 fully independent channels.
- Input from Zone 0 (Zone 20), Division 1, installation in Zone 2, Division 2.
- Contact/Proximity Detector Input.
- Short and open circuit fault detection.
- Three port isolation, Input/Output/Supply.
- EMC Compatibility to EN61000-6-2, EN61000-6-4.
- ATEX, IECEx, UL & C-UL, FM & FM-C, INMETRO, EAC-EX, UKR TR n. 898 Certifications.
- Type Approval Certificate DNV and KR for marine applications.
- High Reliability, SMD components.
- High Density, two channels per unit.
- Simplified installation using standard DIN Rail and plug-in terminal blocks.
- 250 Vrms (Um) max. voltage allowed to the instruments associated with the barrier.

Ordering Information:

Model:	D1034	
1 channel	S	
2 channels	D	
Power Bus enclosure		/B

Parameters Table:

Safety Description	Maximum External Parameters			
	Group Cenelec	Co/Ca (μF)	Lo/La (mH)	Lo/Ro (μH/Ω)
Terminals 14-15, 10-11				
Uo/Voc = 9.6 V	IIC	3.6	336	1449
Io/Isc = 11 mA	IIB	26.0	1345	5790
Po/Po = 25 mW	IIA	210.0	2690	11590

NOTE for USA and Canada:

IIC equal to Gas Groups A, B, C, D, E, F and G

IIB equal to Gas Groups C, D, E, F and G

IIA equal to Gas Groups D, E, F and G

Image:



Function Diagram:

HAZARDOUS AREA ZONE 0 (ZONE 20) GROUP IIC,
HAZARDOUS LOCATIONS CLASS I, DIVISION 1, GROUPS A, B, C, D,
CLASS II, DIVISION 1, GROUPS E, F, G, CLASS III, DIVISION 1,
CLASS I, ZONE 0, GROUP IIC

SAFE AREA, ZONE 2 GROUP IIC T4,
NON HAZARDOUS LOCATIONS, CLASS I, DIVISION 2,
GROUPS A, B, C, D T-Code T4, CLASS I, ZONE 2, GROUP IIC T4

