

D5263

I.S. SIL2 Load Cell/Strain Gauge Bridge Repeater

The Load Cell/Strain Gauge Bridge Repeater D5263 module is a unit suitable for applications requiring SIL 2 level in safety related systems for high risk industries. The unit acts as a transparent galvanic isolated interface installed between a weighing indicator in Safe Area and a load cell (or group of load cells) in Hazardous Area; it appears at the terminals of the indicator as a single load cell equivalent to the one in the field. It provides a fully floating power supply voltage with remote sensing capability to load cell located in Hazardous Area and repeats, while isolating, the mV signal output to drive a load in Safe Area depending on the host system reference voltage. Up to four 350 Ω load cells, or five 450 Ω load cells, or ten 1000 Ω load cells can be connected in parallel. The Voltage reference (Safe Area side) is set as an external supply.

FEATURES

- SIL 2 / SC 3
- Input from Zone 0
- Installation in Zone 2
- Strain Gauge Bridge Transparent Repeater
- Up to four 350 Ω load cells in parallel
- High Accuracy
- Three port isolation, Input/Output/Supply

ORDERING INFORMATION


Ordering codes

D5263S: 1 channel

Accessories

Bus Connector JDFT050, Bus Mounting Kit OPT5096.

OVERALL DIMENSIONS

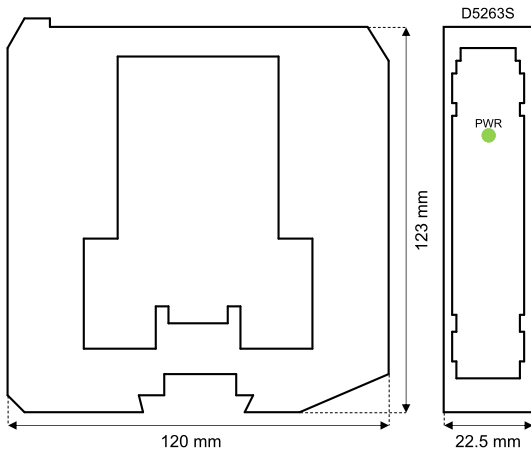

TECHNICAL DATA

Supply

24 Vdc nom (18 to 30 Vdc), reverse polarity protected.

Current consumption: 75 mA @ 24 Vdc with four 350 Ω load cells connected, typical.

Power dissipation: 1.8 W @ 24 Vdc with four 350 Ω load cells connected, typical.

Input

Up to four 350 Ω load cells in parallel or up to five 450 Ω load cells in parallel or up to ten 1000 Ω load cells in parallel.

Integration time: 12.5 ms.

Bridge supply voltage: 4.0 Vdc nominal.

Bridge output signal: 1 to 4 mV/V.

Output

Same as the input signal.

Output impedance: 500 Ω, typical.

Excitation voltage: externally applied between 4 V and 15 V.

Transfer characteristic: linear.

Response time: ≤ 20 ms (10 to 90 % step change).

Performance

Ref. Conditions: 24 V supply, 23 ± 1 °C ambient temperature.

Calibration accuracy: ≤ ± 0.003 % input FSR, after system calibration.

Linearity accuracy: ≤ ± 0.002 % input FSR.

Temp. influence: ≤ ± 0.002 % input FSR for a 1 °C change.

Isolation

I.S. In/Out 2.5 kV; I.S. In/Supply 2.5 kV; Out/Supply 500 V.

Environmental conditions

Operating temperature: temperature limits -40 to +70 °C.

Storage temperature: temperature limits -45 to +80 °C.

Safety Description

Associated apparatus and non-sparking electrical equipment.

U_o = 7.2 V, I_o = 177 mA, P_o = 471 mW at terminals 13-14-15-16-17-18.

U_m = 250 Vrms or Vdc, -40 °C ≤ T_a ≤ 70 °C.

Mounting

DIN-Rail 35 mm, with or without Power Bus.


Weight: about 165 g.

Connection: by polarized plug-in disconnect screw terminal blocks to accommodate terminations up to 2.5 mm² (13 AWG).

Dimensions: Width 22.5 mm, Depth 123 mm, Height 120 mm.

FUNCTION DIAGRAM

Additional installation diagrams may be found in Instruction Manual.

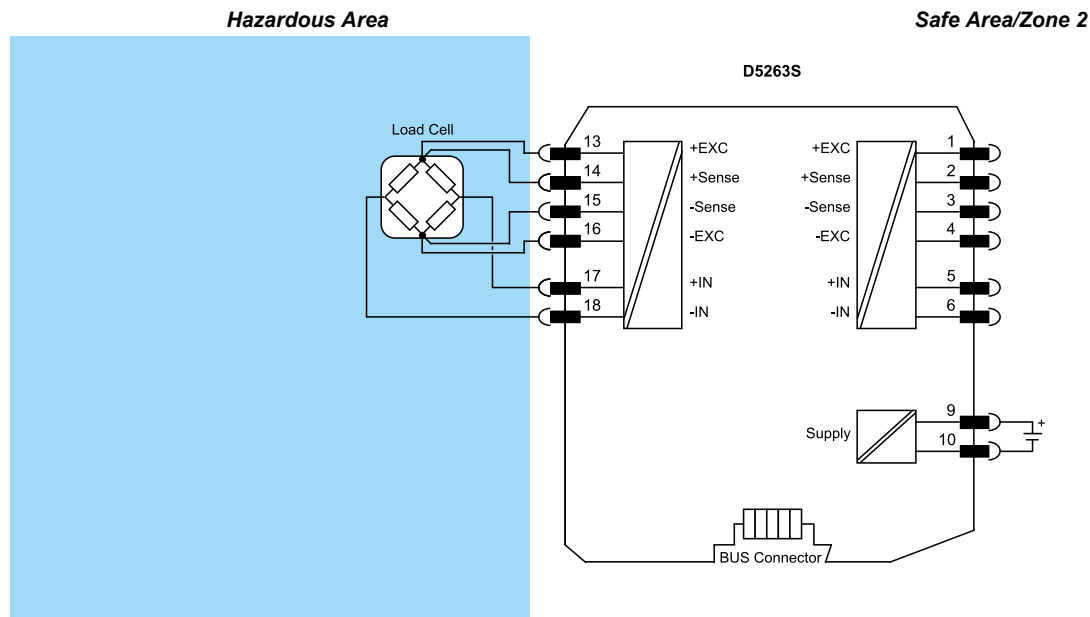

Functional Safety Management Certification:
GM International is certified to conform to IEC61508:2010 part 1 clauses 5-6 for safety related systems up to and included SIL3. In addition, GM International products have been granted I.S. certificates from the most credited Notified Bodies in the world.

Data specified in this document are merely descriptive of the products and should be integrated with relevant technical specifications. Our products are in constant development and the information presented herein refers to the time of document issue. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. Terms & Conditions can be found at our website. For more information refer to instruction manual.