

TBE-D5008-GMI-003

8-pos Term. Board for D5000/D6000 Series with Terminals

This Termination Board with Enclosure (TBE) provides terminals for the direct connection between the I/O Card of the system and D5000 / D6000 Series modules.

The Intrinsically Safe protection and signal isolation between Safe and Hazardous Area, is provided by D5000 Series Associated Apparatus. The 24 Vdc Power Supply of the TBE is connected to two plug-in terminal blocks, for a redundant power supply.

FEATURES


- Universal board interfaces with terminals
- 8 positions Termination Board for up to 16 channels
- Zone 2 Installation (pending)
- Power supplies fault monitoring
- Mounting hardware provided for single DIN Rail mounting kit

SUPPORTED CARDS & MODULES

SYSTEM	I/O CARD	CARDS / BOARDS	MODULES
Any	AI 8 ch	1	D5011S, D5014S, D5015S*, D5016S*, D5072S, D6001S, D6011S, D6014S, D6015S*, D6016S*, D6017S*, D6072S
Any	AI 8 ch	2	D5011D, D5014D, D5016D*, D5072D, D6001D, D6011D, D6014D, D6016D*, D6072D
Any	AO 8 ch	1	D5020S, D6001S, D6020S
Any	AO 8 ch	2	D5020D, D6001D, D6020D
Any	DI 8 ch	1	D5031S, D5032S, D5034S, D5037S, D5038S*, D5093S, D6001S, D6031S, D6032S, D6034S, D6037S, D6038S*
Any	DI 8 ch	2	D5031D, D5032D, D5034D, D5037D, D5038D*, D5038X*, D5093D, D6001D, D6031D, D6032D, D6034D, D6037D, D6038D*, D6038X*
Any	DO 8 ch	1	D5040S, D5048S, D5049S, D5090S, D5091S, D5094S, D5095S, D5096S, D5097S, D5098S, D5099S, D6001S
Any	DO 8 ch	2	D5040D, D5098D, D5099D, D6001D

For more detailed information, refer to Instruction Manual.

TERMINATION BOARD IMAGE

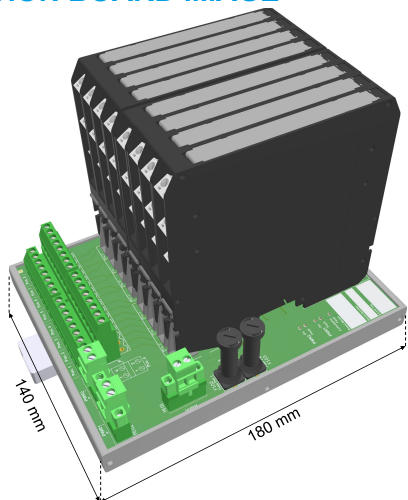

TECHNICAL DATA

General

Number of positions: 8

Maximum number of channels: 16

Supply

24 Vdc nom (20 to 30 Vdc), reverse polarity protected, double terminal blocks for redundant power supply, with OR diodes to mix supply voltages.

Max allowed current consumption: 1 A (as total supply).

Connection: by polarized plug-in disconnect screw terminal blocks to accommodate terminations up to 2.5 mm², screw fix.

Protection fuse: 2 A time lag.

Fault detection

The on-board diagnostic monitors both power supplies integrity and the module cumulative fault. Any malfunction is reported by deactivating a solid-state relay and activating the corresponding LEDs.

Alarm is issued if:

- 1) Power supply 1 or 2 < 17 Vdc or
- 2) Power supply 1 or 2 > 33 Vdc or
- 3) Module cumulative fault ON.

Alarm is removed if:

- 1) 20 Vdc < Power supply 1 and 2 < 30 Vdc and
- 2) No module cumulative fault.

Connection: by polarized plug-in disconnect screw terminal blocks to accommodate terminations up to 2.5 mm², screw fix.

Output rating: 100 mA 35 V (≤ 1 V voltage drop).

I/O Card Interface

Connection: 16+16 screw terminal blocks to accommodate terminations up to 2.5 mm², with exact correspondence to module 1-to-4 terminals.

Environmental conditions

Operating temperature: temperature limits -40 to +70 °C.

Max altitude: 2000 m a.s.l.

Storage temperature: temperature limits -45 to +80 °C.

Mounting

Hardware included for mounting on single DIN-rail 35 mm.

Weight: about 0.9 kg, excluding modules.

Location: installation in Safe Area/Zone 2 (pending).

Dimensions: Width 140 mm, Depth 180 mm, Height 154 mm.

ORDERING INFORMATION

Ordering codes

TBE-D5008-GMI-003

FUNCTION DIAGRAM

Additional installation diagrams may be found in Instruction Manual.

