

D6000

Pass-Through Module

The Pass-Through D6000 module puts into direct connection the system with the field for a flexible marshalling.

FEATURES

- 2 fully independent channels
- High Density, two channels per unit

ORDERING INFORMATION

Ordering codes

D6000S: 1 channel

D6000D: 2 channels

Accessories

DIN-Rail stopper MCHP196.

TECHNICAL DATA

Input/Output

Voltage rating: 50 V.

Current rating: 0.5 A, limitations may apply when used on Termination Board.

Environmental conditions

Operating temperature: temperature limits –40 to +70 °C.

Storage temperature: temperature limits –45 to +80 °C.

Mounting


DIN-Rail 35 mm, or on custom Term. Board.

Weight: about 100 g.

Connection: by polarized plug-in disconnect screw terminal blocks to accomodate terminations up to 2.5 mm² (13 AWG).

Dimensions: Width 12.5 mm, Depth 123 mm, Height 120 mm.

OVERALL DIMENSIONS

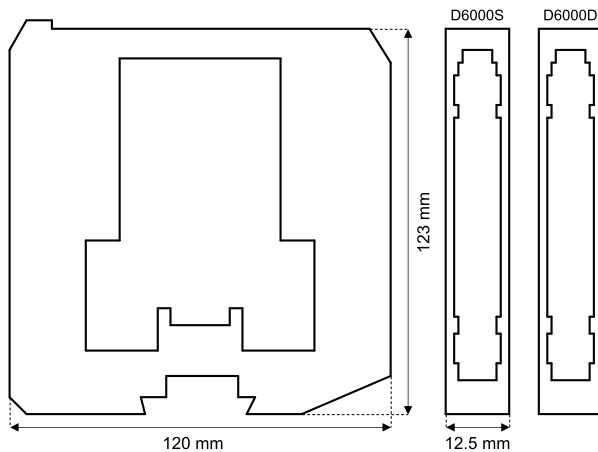

FUNCTION DIAGRAM

Additional installation diagrams may be found in Instruction Manual.

