

TB-D5016-INV-007

16-pos Term. Board for Schneider Foxboro FBM207b/c

This Termination Board provides direct connection between the I/O Card of the system and D5000 / D6000 Series modules.
The Intrinsically Safe protection and signal isolation between Safe and Hazardous Area, is provided by D5000 Series Associated Apparatus. The TB allows redundant 24 Vdc power supplies.

FEATURES


- Schneider Foxboro DI Card Interface
- 16 positions Termination Board for up to 32 channels
- Lower cables installation and maintenance costs
- Power supplies fault monitoring
- Hardware provided for single DIN Rail or wall mounting kit

SUPPORTED CARDS & MODULES

SYSTEM	I/O CARD	CARDS / BOARDS	MODULES
Foxboro FBM200	FBM207b	1	D5031S, D5032S, D5037S, D5093S, D6002S, D6031S, D6032S, D6037S
Foxboro FBM200	FBM207b	2	D5031D, D5032D, D5037D, D5093D, D6000D, D6031D, D6032D, D6037D
Foxboro FBM200	FBM207c	1	D5032S, D6032S
Foxboro FBM200	FBM207c	2	D5032D, D6032D

For more detailed information, refer to Instruction Manual.

TERMINATION BOARD IMAGE

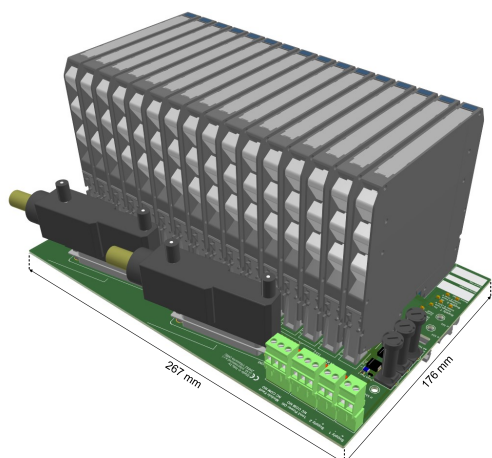

TECHNICAL DATA

General

Number of positions: 16

Maximum number of channels: 32

Supply

24 Vdc nom (20 to 30 Vdc), reverse polarity protected, redundant power supplies, with OR diodes to mix supply voltages.

Max allowed current consumption: 1.5 A (as total supply).

Connection: by polarized plug-in disconnect screw terminal blocks to accommodate terminations up to 2.5 mm².

Protection fuse: 4 A time lag.

Fault detection

The on-board diagnostic monitors both power supplies integrity and the module cumulative fault. Any malfunction is reported by deactivating a relay and activating the corresponding LEDs.

1002 Power OK Fault is issued if:

- 1) Power supply 1 or 2 < 18 Vdc or
- 2) Power supply 1 or 2 > 30 Vdc

Module Fault is issued if:

- 1) Both Power supplies in fault or
- 2) Any module cumulative fault.

Connection: by polarized plug-in disconnect screw terminal blocks to accommodate terminations up to 2.5 mm².

Output rating: 2 A 36 Vac 72 VA, 2 A 48 Vdc 80 W (resistive load).

I/O Card Interface

Connection: two SUB-D 37 poles male connectors (requiring female mating connectors).

Cable: Type 4.

Environmental conditions

Operating temperature: temperature limits -40 to +70 °C.

Max altitude: 2000 m a.s.l.

Storage temperature: temperature limits -45 to +80 °C.

Mounting

Hardware included for mounting on single DIN-rail 35 mm or wall.

Weight: about 400 g (excluding modules and mounting options).

Location: installation in Safe Area.

Dimensions: Width 267 mm, Depth 176 mm, Height 125 mm.

ORDERING INFORMATION

Ordering codes

TB-D5016-INV-007

FUNCTION DIAGRAM

Additional installation diagrams may be found in Instruction Manual.

