


# Customized Termination Boards D5000/D6000 Series



These Termination Boards, with (TBE) or without (TB) metal enclosure, provide direct connection between the I/O Card of the system and D5000 / D6000 Series modules, which interface the field. Intrinsically Safe protection and signal isolation between Safe and Hazardous Area are provided by D5000 Series Associated Apparatus. 24 Vdc Power Supply of the TB is connected to two plug-in terminal blocks to enforce redundancy. Power supplies out of range and cumulative module fault can be monitored through a dedicated contact. Modules are supplied via Termination Board power bus. TB are provided with one universal mounting kit for wall and DIN-Rail, while TBE can be mounted on DIN-Rail with either plastic or metal clips, depending on the chosen accessory.

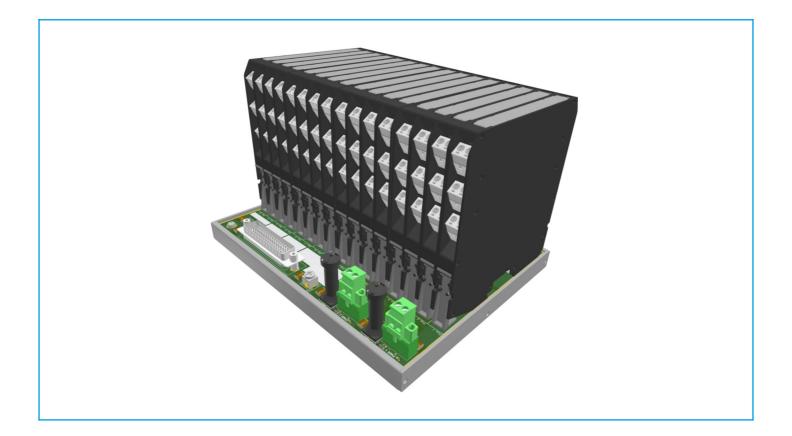

emp. TMP0057 Rev.0

www.gminternational.com

Functional Safety Management Certification:

GM International is certified to conform to IEC61508:2010 part 1 clauses 5-6 for safety related systems up to and included SIL3. In addition, GM International products have been granted I.S. certificates from the most credited Notified Bodies in the world.

Data specified in this document are merely descriptive of the products and should be integrated with relevant technical specifications. Our products are in constant development and the information presented herein refers to the time of document issue. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. Terms & Conditions can be found at our website. For more information refer to istruction manual.

# **TRICON CX**

# **IS** Applications

#### Analog Input

I/O Cards	Card Ch.	TB Model	TB Pos.	GMI Modules	Card Qty.	Cable	Notes
3722X 3723X	32	TB-D5016-TRI-011 TBE-D5016-TRI-011	16	D5011S, D5014S, D5015SS, D5016SS, D5072S	1/2	4X00189-5xx (*1)	
3722X 3723X	32	TB-D5016-TRI-011 TBE-D5016-TRI-011	16	D5011D, D5014D, D5016DS, D5072D	1	4X00189-5xx (*1)	
3722X	32	TBE-D5001-TRI-001		5700 (*2)	1	4X00189-5xx (*1)	

(\*1) xx = Cable length in 10-feet increments: see "Triconex field Termination guide" for cable details and for LSZH or zero-degree alternatives

(\*2) The quantity of 5700 depends on the chosen architecture (see 5700 datasheet for details). Barriers are necessary to protect IS loops.

#### Analog Output

I/O Cards	Card Ch.	TB Model	TB Pos.	GMI Modules	Card Qty.	Cable	Notes
3809X 3809AX	16	TB-D5016-TRI-010 TBE-D5016-TRI-010	16	D5020S	1	4X00227-5xx (*1)	

(\*1) xx = Cable length in 10-feet increments: see "Triconex field Termination guide" for cable details and for LSZH or zero-degree alternatives

# **Digital Input**

I/O Cards	Card Ch.	TB Model	TB Pos.	GMI Modules	Card Qty.	Cable	Notes
3506X	32	TB-D5016-TRI-012 TBE-D5016-TRI-012	16	D5031S, D5032S, D5037S, D5038SA, D5039SA	1/2	4X00226-3xx (*1)	
3506X	32	TB-D5016-TRI-012 TBE-D5016-TRI-012	16	D5031D, D5032D, D5037D, D5038DA, D5038XA, D5039DA, D5039XA	1	4X00226-3xx (*1)	

(\*1) xx = Cable length in 10-feet increments: see "Triconex field Termination guide" for cable details and for LSZH or zero-degree alternatives

# **Digital Output**

I/O Cards	Card Ch.	TB Model	TB Pos.	GMI Modules	Card Qty.	Cable	Notes
3626X	32	TB-D5016-TRI-007 TBE-D5016-TRI-007	16	D5040S, D5048S, D5049S	1/2	4X00188-3xx (*1)	
3626X	32	TB-D5016-TRI-009 TBE-D5016-TRI-009	16	D5040D	1	4X00188-3xx (*1)	

(\*1) xx = Cable length in 10-feet increments: see "Triconex field Termination guide" for cable details and for LSZH or zero-degree alternatives

#### Universal

I/O Cai	ds	Card Ch.	TB Model	TB Pos.	GMI Modules	Card Qty.	Cable	Notes
3902 3902		16	TB-D5016-TRI-010 TBE-D5016-TRI-010	16	D5014S, D5015SK, D5016SK, D5020S, D5031S, D5032S, D5037S, D5038SB, D5039SB, D5049S, D5072S- 099	1	4X00224-3xx (*1)	

(\*1) xx = Cable length in 10-feet increments: see "Triconex field Termination guide" for cable details and for LSZH or zero-degree alternatives

F

www.gminternational.com

Functional Safety Management Certification:

GM International is certificate control of m to IEC61508:2010 part 1 clauses 5-6 for safety related systems up to and included SIL3. In addition, GM International products have been granted I.S. certificates from the most credited Notified Bodies in the world.

Data specified in this document are merely descriptive of the products and should be integrated with relevant technical specifications. Our products are in constant development and the information presented herein refers to the time of document issue. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. Terms & Conditions can be found at our website. For more information refer to istruction manual.

# **TRICON CX NON-IS Applications**

# Analog Input

I/O Cards	Card Ch.	TB Model	TB Pos.	GMI Modules	Card Qty.	Cable	Notes
3722X 3723X	32	TB-D5016-TRI-011 TBE-D5016-TRI-011	16	D6001S, D6004S, D6011S, D6014S, D6015SS, D6016SS, D6017SS, D6072S	-	4X00189-5xx (*1)	
3722X 3723X	32	TB-D5016-TRI-011 TBE-D5016-TRI-011	16	D6001D, D6011D, D6014D, D6016DS, D6072D	1	4X00189-5xx (*1)	
3722X	32	TBE-D5001-TRI-001		5700 (*2)	1	4X00189-5xx (*1)	

(\*1) xx = Cable length in 10-feet increments: see "Triconex field Termination guide" for cable details and for LSZH or zero-degree alternatives (\*2) The quantity of 5700 depends on the chosen architecture (see 5700 datasheet for details).

## Analog Output

I/O Cards	Card Ch.	TB Model	TB Pos.	GMI Modules	Card Qty.	Cable	Notes
3809X 3809AX	16	TB-D5016-TRI-010 TBE-D5016-TRI-010	16	D6001S, D6020S	1	4X00227-5xx (*1)	

(\*1) xx = Cable length in 10-feet increments: see "Triconex field Termination guide" for cable details and for LSZH or zero-degree alternatives

#### **Digital Input**

I/O Cards	Card Ch.	TB Model	TB Pos.	GMI Modules	Card Qty.	Cable	Notes
3506X	32	TB-D5016-TRI-012 TBE-D5016-TRI-012	16	D5093S, D6001S, D6031S, D6032S, D6037S, D6038SA, D6039SA	1/2	4X00226-3xx (*1)	
3506X	32	TB-D5016-TRI-012 TBE-D5016-TRI-012	16	D5093D, D6001D, D6031D, D6032D, D6037D, D6038DA, D6038XA, D6039DA, D6039XA	1	4X00226-3xx (*1)	

(\*1) xx = Cable length in 10-feet increments: see "Triconex field Termination guide" for cable details and for LSZH or zero-degree alternatives

## **Digital Output**

I/O Cards	Card Ch.	TB Model	TB Pos.	GMI Modules	Card Qty.	Cable	Notes
3626X	32	TB-D5016-TRI-007 TBE-D5016-TRI-007		D5090S, D5091S, D5094S, D5095S, D5096S, D5097S, D5098S, D6001S	1/2	4X00188-3xx (*1)	
3626X	32	TB-D5016-TRI-009 TBE-D5016-TRI-009	16	D5098D, D6001D	1	4X00188-3xx (*1)	

(\*1) xx = Cable length in 10-feet increments: see "Triconex field Termination guide" for cable details and for LSZH or zero-degree alternatives

#### Universal

I/O Cards	Card Ch.	TB Model	TB Pos.	GMI Modules	Card Qty.	Cable	Notes
3902X 3902AX	16	TB-D5016-TRI-010 TBE-D5016-TRI-010	16	D5090S-102, D5091S-103, D5093S, D5094S-104, D5095S-105, D5096S-106, D5097S-107, D6001S, D6004S, D6014S, D6015SK, D6016SK, D6017SK, D6020S, D6031S, D6032S, D6037S, D6038SB, D6039SB, D6072S-099	1	4X00224-3xx (*1)	

(\*1) xx = Cable length in 10-feet increments: see "Triconex field Termination guide" for cable details and for LSZH or zero-degree alternatives



www.gminternational.com

Functional Safety Management Certification:

GM International is certificate control of m to IEC61508:2010 part 1 clauses 5-6 for safety related systems up to and included SIL3. In addition, GM International products have been granted I.S. certificates from the most credited Notified Bodies in the world.

Data specified in this document are merely descriptive of the products and should be integrated with relevant technical specifications. Our products are in constant development and the information presented herein refers to the time of document issue. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. Terms & Conditions can be found at our website. For more information refer to istruction manual.